

# Technical data sheet for Icematic Modular Ice Flaker MF125



MF125

**SPECIFICATIONS**

**Dimensions**

Width: 570mm  
Depth: 535mm  
Height: 545mm

**Nett weight**

53kg

**Packed weight**

60kg

**Water consumption**

Air cooled condensing unit: 4 litres per hour

**Electrical rating**

220-240V, 1P+N+E, 50Hz  
Compressor power rating 634W  
Total absorbed power 570W,  
15A cordset fitted

**Refrigerant type**

R290

**Installation distance from wall**



Rear 150mm  
Right 150mm  
Left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

**Water connection requirements**

Inlet connection: R 3/4"  
Cold water (5-35°C)  
Pressure (1-5 bar)  
Water outlet connection: Ø 20mm

MF125

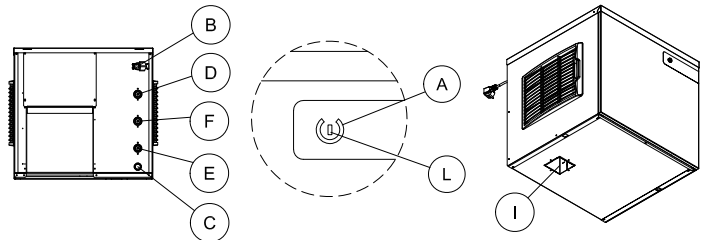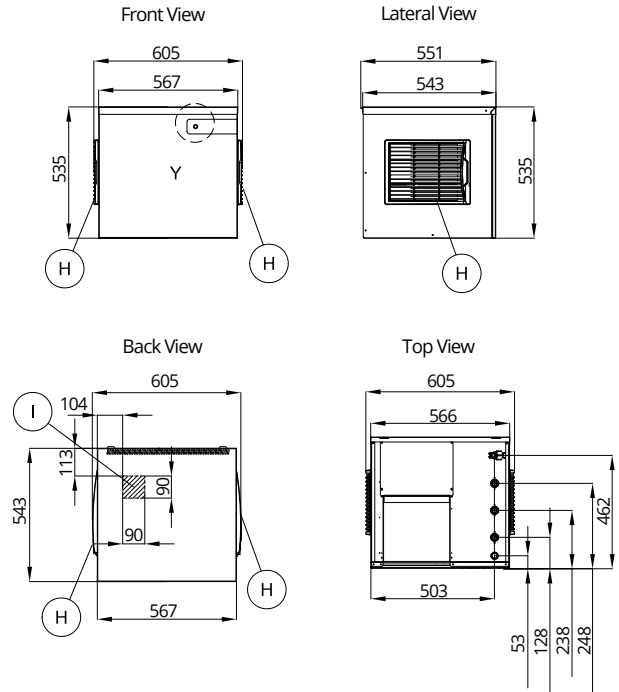

- A. Switch Touch START-STANDBY
- B. Electrical cable supply
- C. Water outlet connection Ø 20mm
- D. Water outlet connection water condensation Ø 20mm
- E. Water inlet connection - 3/4" gas
- F. Water inlet connection water condensation 3/4"
- H. Air Filter
- I. Ice drop area
- L. Led white-red regulation humidity ice and set T° storage probe

**Ice production per 24 hours**  
Water temperature

Ambient temperature	°C	32°	21°	15°	10°	
10°	112	121	125	130		kg
21°	105	114	118	120		kg
32°	85	91	95	98		kg
38°	76	82	86	88		kg



New Zealand [moffat.co.nz](http://moffat.co.nz)

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



an Ali Group Company



The Spirit of Excellence