

Technical data sheet for Icematic Modular Ice Flaker MF205



MF205



MF205

SPECIFICATIONS

Dimensions

Width: 570mm
Depth: 535mm
Height: 545mm

Nett weight

57kg

Packed weight

64kg

Water consumption

Air cooled condensing unit: 4 litres per hour

Electrical rating

220-240V, 1P+N+E, 50Hz
Compressor power rating 878W
Total absorbed power 720W,
10A cordset fitted

Refrigerant type

R290

Installation distance from wall

Rear 150mm
Right 150mm
Left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit



Water connection requirements

Inlet connection: R 3/4"
Cold water (5-35°C)
Pressure (1-5 bar)
Water outlet connection: Ø 20mm



New Zealand moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

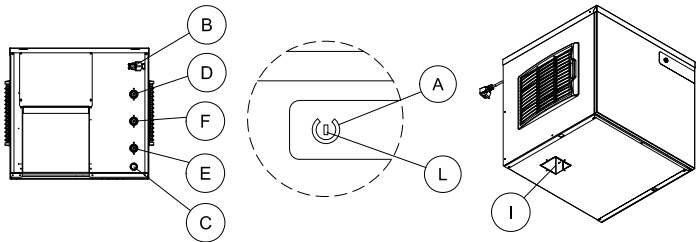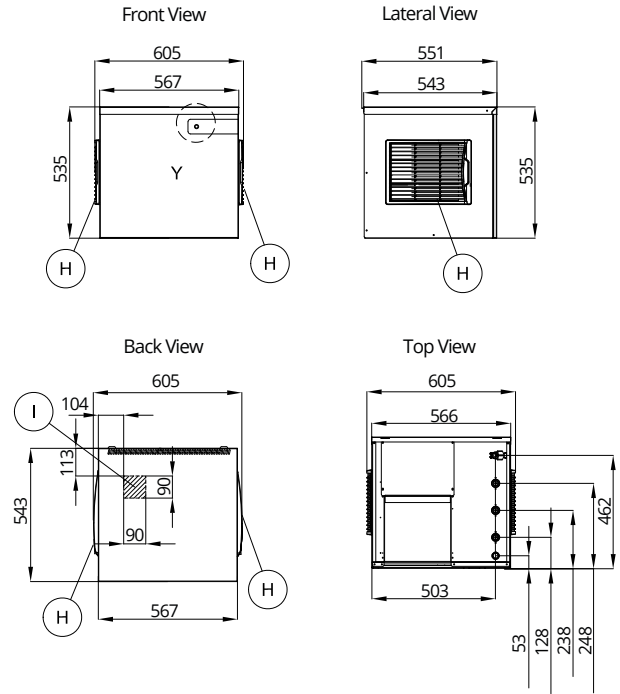

- A. Switch Touch START-STANDBY
- B. Electrical cable supply
- C. Water outlet connection Ø 20mm
- D. Water outlet connection water condensation Ø 20mm
- E. Water inlet connection - 3/4" gas
- F. Water inlet connection water condensation 3/4"
- H. Air Filter
- I. Ice drop area
- L. Led white-red regulation humidity ice and set T° storage probe

Ice production per 24 hours
Water temperature

Ambient temperature	°C	32°	21°	15°	10°	
10°	180	194	198	210		kg
21°	160	174	181	120		kg
32°	140	155	162	169		kg
38°	133	147	154	160		kg