

Technical data sheet for

Icematic Ice Flaker - Self Contained SF130C



SF130C



SF130C

SPECIFICATIONS

Dimensions

Width: 500mm
 Depth: 597mm
 Height: 694mm

Nett weight

50kg

Packed weight

57kg

Water consumption

Air cooled condensing unit: 4 litres per hour

Electrical rating

220-240V, 1P+N+E, 50Hz
 Compressor power rating 634W
 Total absorbed power 570W,
 10A cordset fitted

Refrigerant type

R290


Installation distance from wall

Rear 150mm
 Right 150mm
 Left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

Water connection requirements

Inlet connection: R 3/4"
 Cold water (5-35°C)
 Pressure (1-5 bar)
 Water outlet connection: Ø 20mm

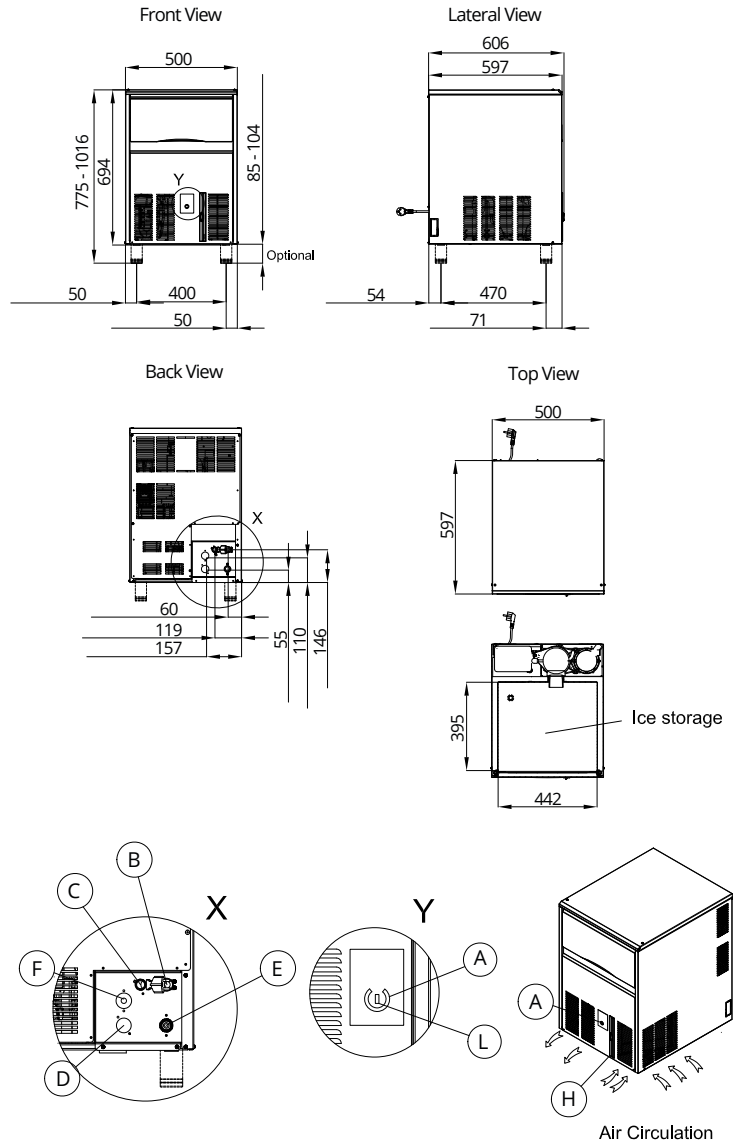

New Zealand moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



- A. Switch Touch START-STANDBY
- B. Electrical cable supply
- C. Water outlet connection Ø 20mm
- D. Water outlet connection water condensation Ø 20mm
- E. Water inlet connection - 3/4" gas
- F. Water inlet connection water condensation 3/4" gas OPTIONAL
- H. Air Filter
- L. Led white-red regulatiune humidity ice and set T° storage probe

Ice production per 24 hours
 Water temperature

Ambient temperature	Water temperature				
	°C	32°	21°	15°	10°
10°	112	121	125	130	kg
21°	105	114	118	120	kg
32°	85	91	95	98	kg
38°	76	82	86	88	kg

© Copyright: Moffat Ltd NZ.ICE01.2024

an Ali Group Company



The Spirit of Excellence