ICEMATIC

Technical data sheet for

Icematic Ice Flaker - Self Contained **SF200C**





SF200C

SPECIFICATIONS

Dimensions

Width: 700mm Depth: 650mm Height: 995mm Nett weight

65kg

Packed weight 72kg

/ZKg

Water consumption

Air cooled condensing unit: 6.5 litres per hour

Electrical rating

220-240V, 1P+N+E, 50Hz Compressor power rating 878W Total absorbed power 720W, 10A cordset fitted

Refrigerant type

R290

Installation distance from wall

Rear 150mm Right 150mm Left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

Water connection requirements

Inlet connection: R ¾" Cold water (5-35°C) Pressure (1-5 bar)

Water outlet connection: Ø 20mm


MOFFRT


New Zealand moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.





SF200C






Back View





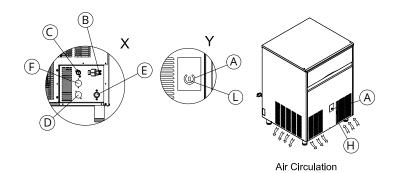

- A. Switch Touch START-STANDBY
- B. Electrical cable supply
- C. Water outlet connection Ø 20mm
- D. Water outlet connection water condensation Ø 20mm
- E. Water inlet connection 3/4" gas
- F. Water inlet connection water condensation ¾" gas OPTIONAL
- H. Air Filter
- L. Led white-red regulatione humidity ice and set T° storage probe

Ice production per 24 hours

Water temperature

| °C | 32° | 21° | 15° | 10° | |
|-----|-------------------|-------------------------------|---|---|---|
| 10° | 180 | 194 | 198 | 210 | kg |
| 21° | 160 | 174 | 181 | 190 | kg |
| 32° | 140 | 155 | 162 | 169 | kg |
| 38° | 133 | 147 | 154 | 160 | kg |
| | 10° 21° 32° | 10° 180 21° 160 32° 140 | 10° 180 194 21° 160 174 32° 140 155 | 10° 180 194 198 21° 160 174 181 32° 140 155 162 | 10° 180 194 198 210 21° 160 174 181 190 32° 140 155 162 169 |

Copyright Moffat Ltd NZ.ICE.01.2024

