

Technical data sheet for

Single Pan Electric Pasta Cooker 450mm

PCLB8140E, PCB8140E7



PCLB8140E

SPECIFICATIONS

Pan Size

Water capacity 40L
Width 365mm
Length 405mm
Basket immersion depth 165mm

Baskets

6 stainless steel perforated baskets with moulded plastic handles
125mm x 165mm x 180mm deep
Stainless steel wire basket support grid

Elements

1 x 10.5kW Incoloy 825 heating element (PC8140E)
1 x 7.0kW Incoloy 825 heating element (PC8140E7)

Electrical Requirements

PC8140E

10.5kW, 400-415V, 50/60Hz,

3P+N+E

L1 14.6A

L2 14.6A

L3 14.6A

PC8140E7

7.0kW, 220-240V, 50/60Hz, 1P+N+E

L1 29.2A

Electrical Connection

56mm from RH side, 541mm from rear and 489mm from floor

Series Options

PCLB - Low back models

PCB - 215mm splashback option



Australia moffat.com.au



New Zealand moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



ISO9001
Quality
Management
Standard

PCB8140E / PCB8140E7

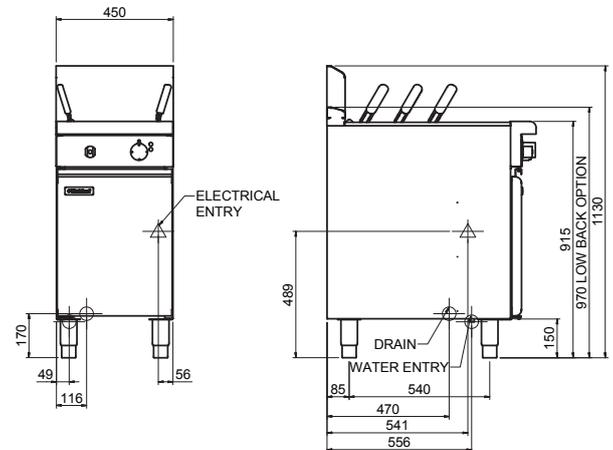

Water Connection

Cold water connection 50mm from left hand side, 556mm from rear and 140mm from floor
R $\frac{1}{2}$ (BSP) male

Drain Connection

Drain must be connected to system suitable for boiling water discharge
1" BSP Male connection 118mm from left hand side, 470mm from rear, and 170mm from floor

Dimensions

Width 450mm
Depth 805mm
Height 915mm
Incl. low back 970mm
Incl. splashback option 1130mm

Nett weight

78kg nett

Packing data

0.53m³, 120kg
Width 870mm
Depth 490mm
Height 1255mm

OPTIONS AT EXTRA COST

Extra baskets - 165mm square x 180mm deep
Optional rectangular baskets 320mm x 165mm x 180mm deep
Side splash guards
Joining caps
Castors
Plinth mounting

an Ali Group Company



The Spirit of Excellence