

Technical data sheet for




Single Pan Gas Pasta Cooker 450mm

PCLB8140G



PCLB8140E

PCLB8140G

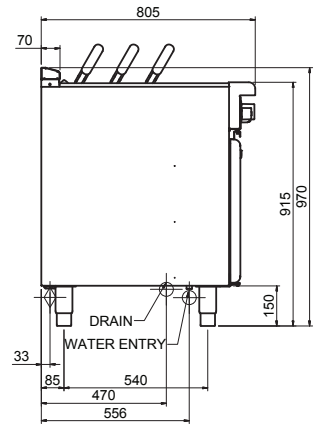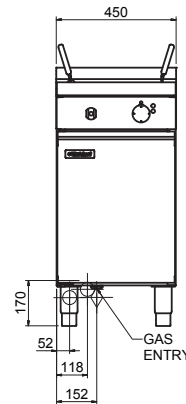

SPECIFICATIONS

Pan Size

Water capacity 40L
 Width 365mm
 Length 405mm
 Basket immersion depth 165mm

Baskets

6 stainless steel perforated baskets with moulded plastic handles
 125mm x 165mm x 180mm deep
 Stainless steel wire basket support grid

Burners

1 x infra-red burner
 Gas power (gross)
 47MJ/hr, 13kW Natural gas
 46MJ/hr, 12.8kW LP gas

Gas connection

R $\frac{3}{4}$ (BSP) male
 300mm from RH side, 35mm from rear, and 125mm from floor
 All units incorporate Natural and LP gas regulator

Water Connection

Cold water connection 50mm from left hand side, 556mm from rear and 140mm from floor
 R $\frac{1}{2}$ (BSP) male

Series Options

PCLB - Low back models
 PCB - 215mm splashback option


 Australia moffat.com.au

 New Zealand moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

Water Connection

Cold water connection 50mm from left hand side, 556mm from rear and 140mm from floor
 R $\frac{1}{2}$ (BSP) male

Drain Connection

Drain must be connected to system suitable for boiling water discharge
 1" BSP Male connection 118mm from left hand side, 470mm from rear, and 170mm from floor

Dimensions

Width 450mm
 Depth 805mm
 Height 915mm
 Incl. low back 970mm
 Incl. splashback option 1130mm

Nett weight

78kg nett

Packing data

0.541m³, 120kg
 Width 870mm
 Depth 495mm
 Height 1255mm

Gas types

Available in Natural gas and LP gas
 Please specify when ordering
 Units supplied complete with gas type conversion kits
 Other gas types on request

OPTIONS AT EXTRA COST

Extra baskets - 165mm square x 180mm deep
 Optional rectangular baskets 320mm x 165mm x 180mm deep
 Side splash guards
 Joining caps
 Castors
 Plinth mounting



ISO9001
 Quality
 Management
 Standard

an Ali Group Company



The Spirit of Excellence