



MFN Series Modular Nugget Ice makers – up to 270kg MFN S 47 AS OX Nugget ice – 1g – Ø11mm x H 13mm



Nugget ice 1g –Ø11mm x H 13mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Maximum production rate 270kg/day
- Head only ice maker: requires a separate storage bin to • store the ice produced
- XSafe Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Air cooled version
- Hermetic compressor
- Stainless steel auger and freezing cylinder (evaporator)
- Plug-and-work technology
- Water in / ice out concept limits excess energy, water and time wastage
- Simple, reliable electromechanic controls
- External indicator lights to show operation status and maintenance alert
- Double protection electronic rotation sensor & drive coupling

- Low-water sensor protection
- Stainless steel finish, top cover in PS plastic with removable panels for ease of maintenance
- Includes removable air filter, water and drain hose

Recommended storage bins

- NB 193 with CBT 22 EFCD cover 129kg storage capacity •
- NB 393 with CBT 30 EFSD cover 178kg storage capacity
- NB 530 with CBT 30 EFSD cover 243kg storage capacity
- NB 948 with CBT 48 FMCD cover 406kg storage capacity
- UBH1100 Upright storage bin 553kg storage capacity
- SIS 300 Ice shuttle storage system 317 + 73kg storage
- SIS 700 Ice shuttle storage system 318 + 73kg storage capacity














MFN Series Modular Nugget Ice makers – up to 270kg MFN S 47 AS OX

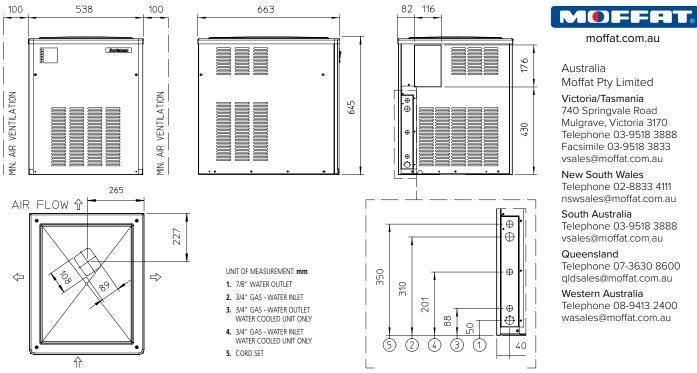

Ice production per 24 hours

Ambient temperature / Water temperature -----00-0 / 0/

10°C / 10°C	21°C / 10°C	32°C/21°C
290	270	215

Dimensions

Width:	538mm
Depth:	663mm
Height:	645mm
Nett weight:	94kg
Packed weight:	103kg

Water consumption

Air cooled version: 8.5 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 950W, 10A cordset supplied

No. Circuit wire: 3 Compressor: 840W Energy consumption: 22.9kW/24hr

Refrigerant type

R404a

Installation distance from wall 100mm Rear

Side 150mm Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4' 5-38°C Cold water: 100-500kPa Pressure: Water outlet connection: Ø⁷/8"



Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd AU.SM.2301

an Ali Group Company

