

AFC Series Self Contained Cubelet Ice Machine – up to 70kg

AFC 87 AS OX Cubelet size – 1g W 16mm x D 15mm x H 7-8mm



Cubelet ice
1g – W 16mm x D 15mm x
H 7-8mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 70kg daily production rate
- 25kg storage bin capacity
- Air cooled version
- Hydrocarbons R290 refrigerant gas
- XSafe - Natural Sanitation System
- Ice evaporator with stainless steel auger
- Advanced diagnostics computerised controls
- External indicator lights to show operation status and maintenance alert
- Resistant stainless steel exterior
- Easy access front condenser air filter
- External indicator lights to show operation status
- Includes removable air filter, ice scoop, water and drain hose

AFC Series Self Contained Cubelet Ice Machine – up to 70kg

AFC 87 AS OX

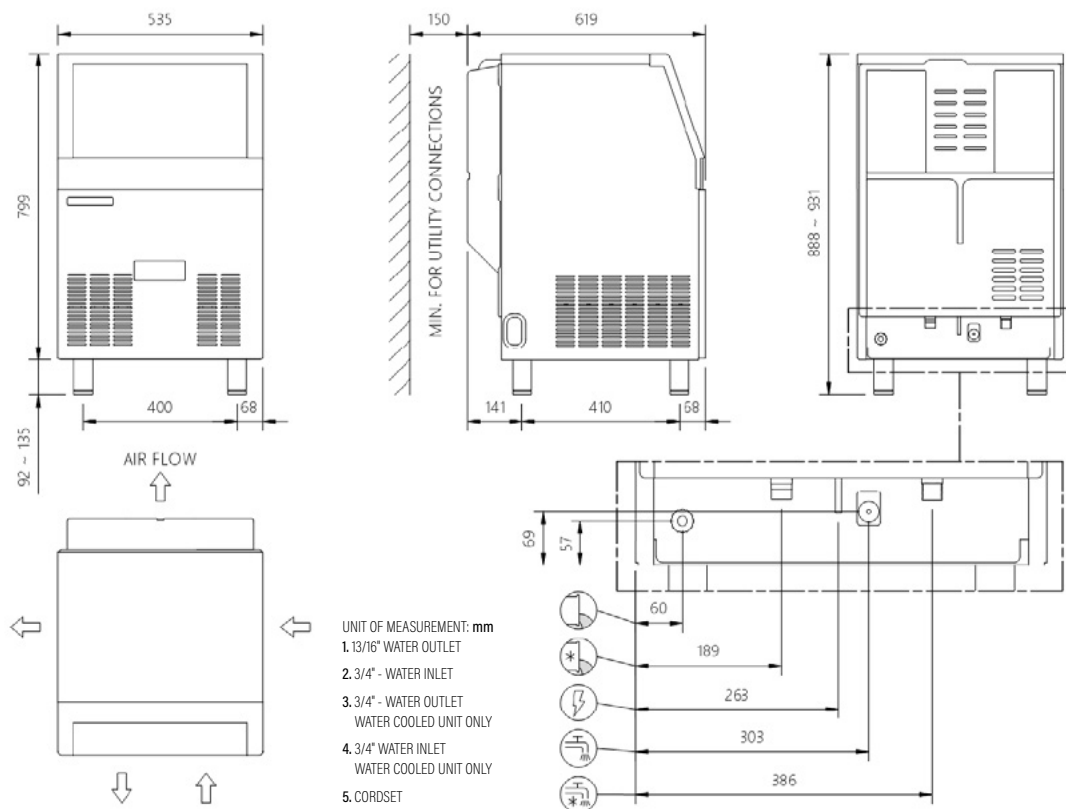

moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production kg per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
74	70	58

Dimensions

Width:	535mm
Depth:	619mm
Height:	891mm (including legs)
Nett weight:	50kg
Packed weight:	58kg

Water consumption

Air cooled version: 3 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 360W,
10A cordset supplied

No. Circuit wire: 3
Compressor: 600W*
Energy consumption: 8kW/24hr*

* Based on 32°C ambient / 21°C water temperature conditions

Refrigerant type

R290

Installation distance from wall

Rear	100mm
Sides	150mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø13/16"

Operating requirements

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2501