

## TECHNICAL DATA SHEET FOR

## ROTEL BAKERY OVENS

## AUR33D3S, AUR34DHC AND AUR34D1S

### STANDARD FEATURES

VTL - variable temperature loading

- energy efficient
- ease of operation
- less down time

Live inbuilt steaming system fitted to all chambers

Interior lamps fitted standard to all chambers.

Each chamber individually controlled

Touch screen controllers centrally mounted

### OVERALL CONSTRUCTION

Internal baking chambers stainless steel

Facia and sides stainless steel

Doors all stainless steel construction

Tempered 10mm thick door glass

Tray holders welded steel and fitted standard to all decks

Turntable drive system bottom mounted

Casters fitted as standard

### OPERATION

Touch screen controllers that operate with minimal staff input

Individual chamber control display

Icon category menu

Up to 99 baking programs (universal programming for all decks)

Programmable time, temp, steam and top/bottom heat balance

Automatic preheating of all decks

Automatic energy saving temperature set-back / idle

Split bake / multiple product program feature applied all decks

Manual bake mode

7 day auto-start

Low-temp bake mode


Automatic back up on event of controller failure

Temperature control range up to 270°C


Bake time range 0-120 minutes standard (adjustable to 256 minutes)




AUR34D1S

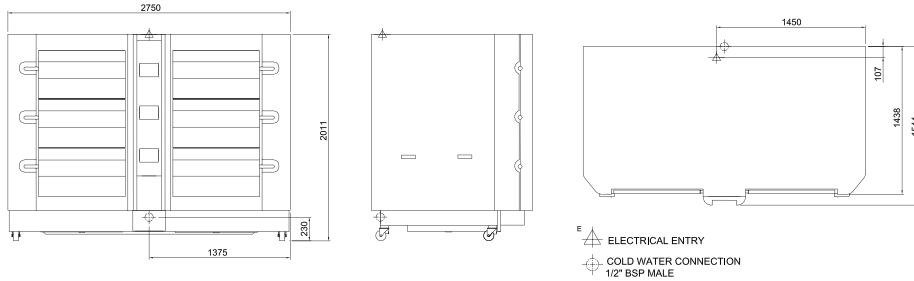

## AUR33D3S

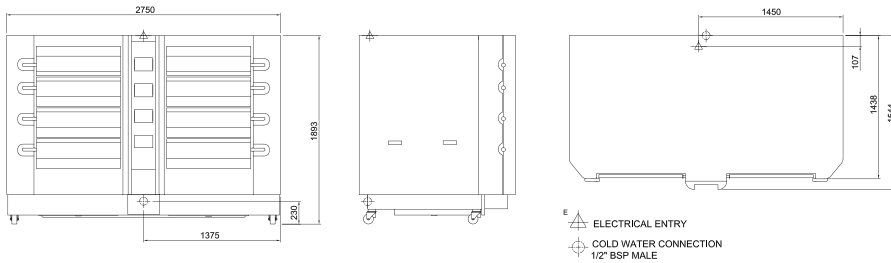

## AUR34DHC

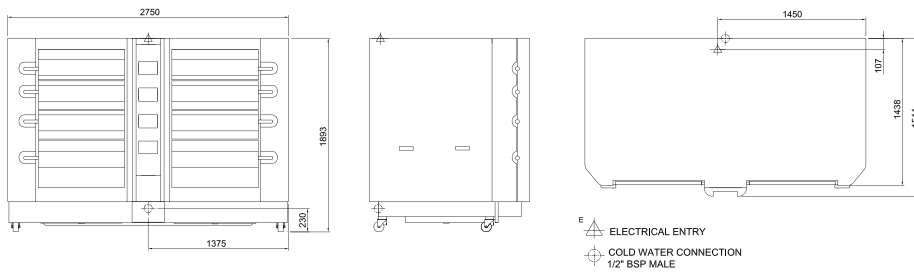

## AUR34D1S

Model	Deck Configuration	Tray <sup>1</sup> Capacity	Loaf <sup>2</sup> Capacity	Dimensions W x D x H mm	Electrical Specifications
<b>AUR33D3S</b>	3 deck, 3 split	24 tray	120	2750 x 1528 x 2011	68kW, 3P+N+E, 400-415v, 50hz
<b>AUR34D1S</b>	4 deck, 1 split	20 tray	120	2750 x 1528 x 1893	58kW, 3P+N+E, 400-415v, 50hz
<b>AUR34DHC</b>	4 deck, high crown	16 tray	96	2750 x 1528 x 1893	48kW, 3P+N+E, 400-415v, 50hz

<sup>1</sup> Oven chambers accept 16" and 18" wide trays

<sup>2</sup> Standard 680gm loaf

### Crown heights (usable)

Standard decks – 180mm (unless top deck)  
Top decks – 200mm (unless split deck)  
Split decks – 170mm (unless top split deck)  
Top Split decks – 205mm / 135mm (offset split)

Model	AUR33D3S	AUR34D1S	AUR34DHC
Nett Weight	1600 kg	1600 kg	1600 kg
<b>Packing Data</b>			
Weight	1760 kg	1760 kg	1760 kg
Width	3090 mm	3090 mm	3090 mm
Depth	1900 mm	1900 mm	1900 mm
Height	2350 mm	2350 mm	2350 mm
Volume	13.8 m3	13.8 m3	13.8 m3

# Bakery

## MOFFAT®

### Australia

Moffat Pty Limited

### Victoria/Tasmania

740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

### New South Wales

Telephone 02-8833 4111  
nswsales@moffat.com.au

### South Australia

Telephone 03-9518 3888  
vsales@moffat.com.au

### Queensland

Telephone 07-3630 8600  
qldsales@moffat.com.au

### Western Australia

Telephone 08-9413 2400  
wasales@moffat.com.au

### New Zealand

Moffat Pty Limited

### Rolleston

45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone 03-389 660  
Facsimile 03-389 6660  
sales@moffat.co.nz

### Auckland

Telephone 09-574 3150  
sales@moffat.co.nz

**Important Notice:**  
This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



ISO9001  
Quality  
Management  
Standard



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

