

Gas Range Static Oven 600mm

CR6D, CR6C, CR6B



- 600mm wide
- Stainless steel finish
- 22MJ/hr open burners
- Cast iron burners and vitreous enamel pot stands
- High crown static oven
- Manual pilot ignition
- Side hinged door
- Welded vitreous enameled oven liner
- Griddle options – 300mm and 600mm machine finished 12mm thickness, with piezo ignition
- Adjustable front feet and rear rollers
- Fully modular
- Optional: Flame failure protection on open burners

OVERALL CONSTRUCTION

Cooktop

- Cast iron open burner heads with vitreous enamelled cast iron caps
- Vitreous enamelled potstands
- 12mm machined surface mild steel griddle plates
- Stainless steel front, sides and splashback
- Aluminised steel spill tray
- Griddle sections are standard on RH side only.

Oven

- Aluminised oven frame
- Fully welded and vitreous enamelled oven liner
- GN 1/1 capacity with 4 position racking
- Supplied with one chrome plated oven rack
- Vitreous enamelled oven spill tray
- Vitreous enamelled door inners
- Stainless steel exterior doors and sides
- 50mm dia. stainless steel adjustable legs to front and two rollers at rear

CONTROLS

Cooktop

- Large easy use control knobs
- Variable high to low controls to open and griddle burners
- Optional flame failure on open burners
- Griddles standard with pilot, flame failure and piezo ignition

Oven


- 80-300°C thermostatic oven control
- Manual ignition to oven pilot burner with flame failure

CLEANING AND SERVICING


- Easy clean stainless steel exterior
- Vitreous enamelled potstands and burner caps
- Lift off open burner caps and removable burners
- Removable cooktop and oven spill trays
- Stainless steel grease trays on griddles
- Access to all parts from front of unit




Gas Range Static Oven 600mm

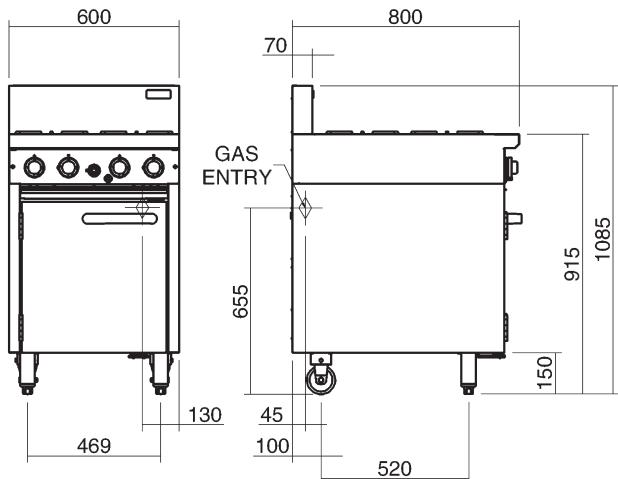


CR6D



CR6C



CR6B



SPECIFICATIONS

Burners

Open Burners;
22MJ/hr, 6.1kW each

Griddle Burners;
20MJ/hr, 5.5kW per 300mm section
Oven; 24MJ/hr, 6.7kW

Gas power (gross)
CR6D 112MJ/hr, 31.1kW
CR6C 88MJ/hr, 24.4kW
CR6B 64MJ/hr, 17.8kW

Oven dimensions

Width 460mm
Depth 615mm
Height 365mm

Rack size

450mm x 590mm
Rack positions 4

Gas connection

R 3/4 (BSP) male
130mm from RH side, 20mm from
rear, and 655mm from floor
All units supplied with Natural and
LP gas regulator

Dimensions

Width 600mm
Depth 800mm
Height 915mm
Incl. splashback 1085mm

Nett weight

115kg

Packing data

0.7m3, 167kg
Width 640mm
Depth 865mm
Height 1255mm

Gas types

Available in Natural gas and LP gas,
please specify when ordering
Other gas types on request



moffat.com.au
moffat.co.nz

Australia
moffat.com.au

Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +612-8833 4111
nswsales@moffat.com.au

South Australia
Telephone -613-9518 3888
vsales@moffat.com.au

Queensland
Telephone +617-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone +61 8-9413 2400
wasales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited

Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz



Service Support



ISO9001
Quality
Management
Standard



Cert. No. 7225G

In line with policy to continually develop
and improve its products, Moffat Limited
reserves the right to change
specifications and design without notice.

© Copyright Moffat Ltd
AN.C.SS.01.17

an Ali Group Company



The Spirit of Excellence