

Convotharm flexx pro Single Pan Electric Multi Pan

CFXP 151F - 110 LITRE CAPACITY

- 110 litre single pan capacity
- 3 x 1/1 GN pan size
- 63dm² cooking surface
- 220mm depth pan
- Multi pan for cooking, frying, braising, grilling, searing, broiling and sous-vide cooking
- Independent automatic arm for lifting / lowering of baskets
- Automatic water filling system with accuracy of 1 decilitre
- Electromechanical tray tilting at variable speed
- 12" colour touch screen with intuitive controls
- Automatic and manual meal preparation mode with memory for 800 programs with 12 steps
- Multipoint core temperature probe
- Integrated retractable hand shower



Overall Construction

- Base frame with 3mm 304 grade stainless steel
- Frame cover with 304 grade stainless steel
- Tray with 3mm 316 grade stainless steel
- Special sandwich design pan base
- Stainless steel SUPER BLOCK JPX 17 full area heat distribution system
- Robust double insulated cover with automatic lifting function
- Excessive steam exhaust on cover
- Integrated 230V / 16A socket
- Retractable switchboard panel on right pillar allowing integration of multiple pans in a single block

Controls

- Fast base preheating
- Temperature range from 30°C-250°C
- Accurate sensory measurement of temperature
- Liquid level gauge
- Integrated drainage in the tray bottom with automatic closure
- Preset technological procedures
- Automatic lowering of baskets - allows operation with cover closed
- Safety sensor for basket arm detection
- Fault messages shown on display
- Water pressure controller
- HACCP recording
- USB port for data backup

Accessories

- Easy clean stainless steel surface
- Easy services access from front and top sides
- Technical and service information on display

Convotharm flexx pro Single Pan Electric Multi Pan

CFXP 151F - 110 LITRE CAPACITY

DIMENSIONS

Width	1651 mm
Depth	850 mm
Height	1050 mm
Weight	417kg

CAPACITY

110 litre

PACKED DIMENSIONS

Width	1765 mm
Depth	920 mm
Height	1145 mm
Weight	445kg

ELECTRICAL SUPPLY

415V, 3P+N+E, 50Hz, 50A

Energy consumption 38.2kW


WATER CONNECTION

Inlet connection R ¾

Water outlet connection Ø 50

INSTALLATION CONDITIONS

(for precise installation instructions please refer to our installation manual)

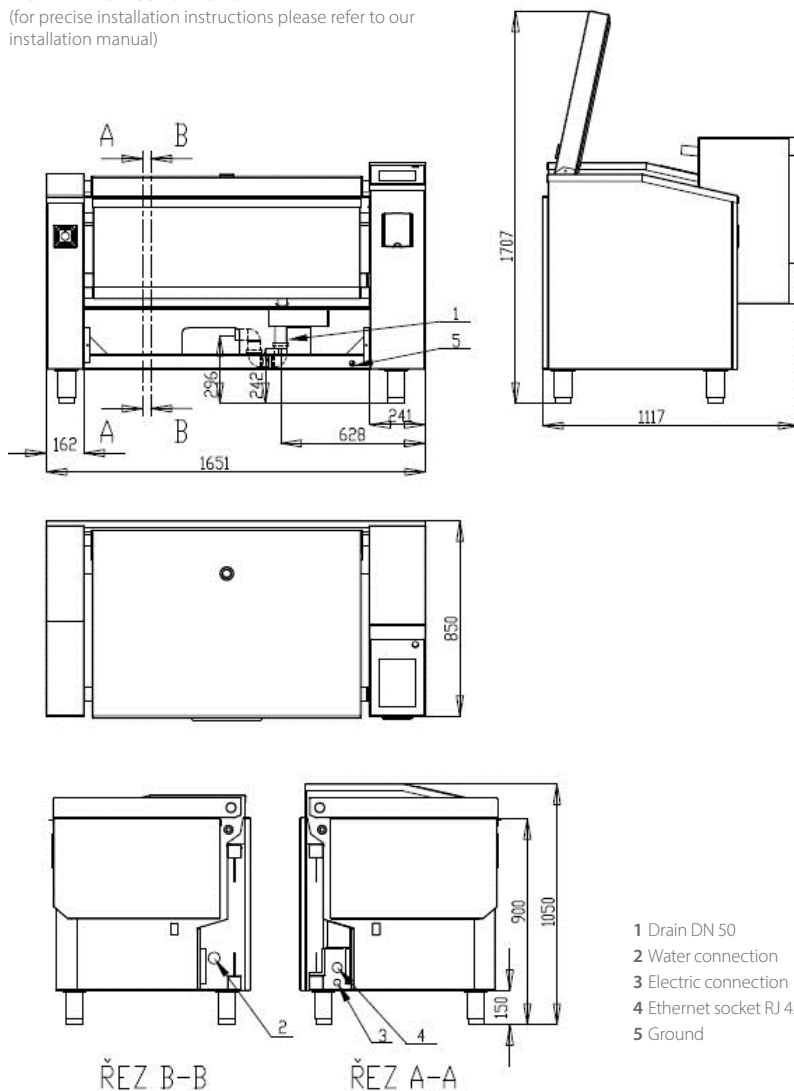

- 1 Drain DN 50
- 2 Water connection
- 3 Electric connection
- 4 Ethernet socket RJ 45
- 5 Ground



moffat.com.au

moffat.co.nz

Australia

moffat.com.au

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road
Mulgrave, Victoria 3170
Telephone +61 3-9518 3888
Facsimile +61 3-9518 3833
vsales@moffat.com.au

New South Wales

Telephone +61 2-8833 4111
nswsales@moffat.com.au

South Australia

Telephone +61 3-9518 3888
vsales@moffat.com.au

Queensland /

Northern Territory

Telephone +61 7-3630 8600
qldsales@moffat.com.au

Western Australia

Telephone +61 8-9413 2400
wasales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited

Rolleston

45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150
sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.CON.S.01.25



an Ali Group Company



The Spirit of Excellence