

ICEMATIC



TROPICAL SERIES
ICE DISPENSER - SELF CONTAINED
DX35A

TECHNICAL SPECIFICATION SHEET FOR

Icematic Ice Dispenser - Self Contained **DX35A**



- Floor model
- **27kg** daily production rate
- **12.6kg** storage bin capacity
- Dia. 29mm x H 32mm, 20g ice cubes
- Spray system technology to produce patented pure, clear and transparent ice cubes
- Air cooled condensing unit
- Electric control, touch free ice dispensing system
- Cubes drop directly into consumer glass
- Stainless steel external body
- Front ventilation for improved yield even in critical install
- Includes fitted legs
- Moffat TA13-NZ filter kit, including head and fittings

Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

ICEMATIC




TROPICAL SERIES

ICE DISPENSER - SELF CONTAINED DX35A

TECHNICAL SPECIFICATION SHEET FOR

Icematic Ice Dispenser - Self Contained DX35A

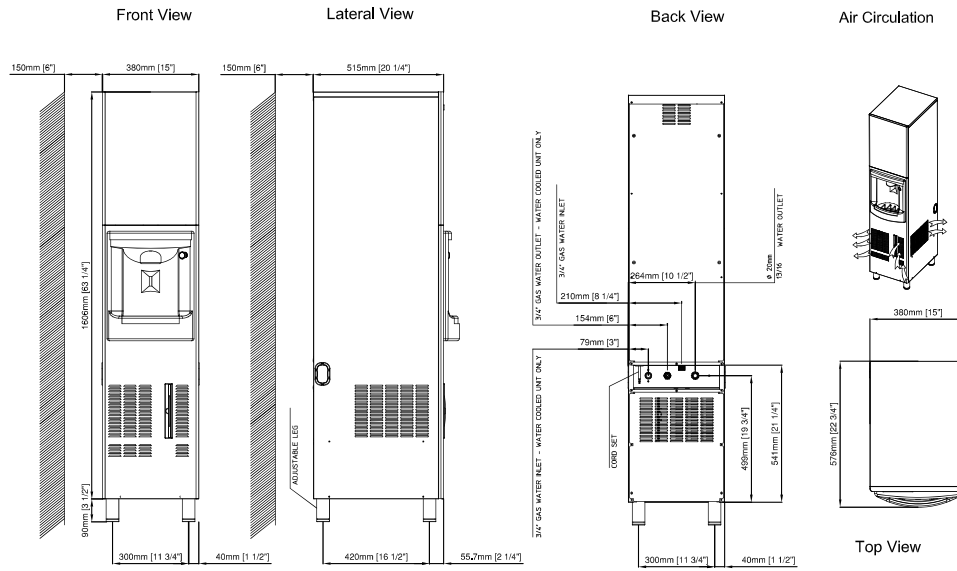

moffat.co.nz

New Zealand
Moffat Limited
Christchurch
45 Illinois Drive
Rolleston
Christchurch 7675
Telephone 03-983 6600
Facsimile 03-983 6660
sales@moffat.co.nz
Auckland
Telephone 09-574 3150
sales@moffat.co.nz

Ice production per 24 hours

| Water temperature | | | | | | |
|---------------------|-----|-----|-----|-----|-----|----|
| Ambient temperature | °C | 32° | 21° | 15° | 10° | |
| | 10° | 21 | 25 | 27 | 29 | kg |
| | 21° | 19 | 23 | 25 | 27 | kg |
| | 32° | 15 | 15 | 15 | 15 | kg |
| | 38° | 12 | 12 | 12 | 12 | kg |

DX35A

Dimensions

Width: 380mm
Height: 1720mm (including legs)
Depth: 515mm
Nett weight: 51kg
Packed weight: 60kg

Water consumption

Air cooled version: 2.67 litres per hour

Electrical rating

Air cooled version: 230V, 1P+N+E, 50Hz
Compressor power rating 786W
Total absorbed power 300W
10A cordset fitted

Refrigerant type

R134a

Installation distance from wall

- rear 150mm
- right 150mm
- left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

Water connection requirements

Inlet connection: R 3/4"
Cold water (5-35°C)
Pressure (1-5 bar)
Water outlet connection: Ø 20mm

Disclaimer:

All unit capacities are based on subjective testing. Moffat accepts no liability for production values.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
NZ.ICES.2301



an Ali Group Company



The Spirit of Excellence