

Technical data sheet for

E32D4 OVEN / VH32 VENTLESS HOOD ON THE SK32 STAND

Full Size Digital / Electric Convection Oven with
Halton Ventless Condensing Hood on a Stainless Steel Stand



E32D4

Unit shall be a Moffat electrically heated Turbofan Convection Oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for four full size sheet pans. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes with programmable moisture injection, 2 speed oven fan, and 3 stage cooking. A core temperature probe M236060 is optional. The unit shall include dual halogen oven lamps. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK32. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

SK32

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with and support Turbofan Convection Oven models E32D and G32D. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 4 460mm x 660mm / 18" x 26" full size sheet pan capacity
- 4 400mm x 600mm tray capacity
- 110mm tray spacing
- Compact 735mm width
- Digital display Time and Temperature Controls
- USB port for programs
- 30 programs with 3 stage cooking and stage end alarms
- Core Probe program cooking (optional Core Probe Kit)
- Moisture injection mode (5 levels) and manual injection
- 2 speed bi-directional reversing fan system
- 6.3kW heating power
- Safe-Touch vented side hinged door
- Vitreous enameled oven chamber

STANDARD FEATURES – VENTLESS CONDENSATION HOOD

- Removes need for installation under canopy or ducted oven hood
- Complies with EPA202 test method for less than <5mg/m³ grease laden effluent limits
- 3 stage filtering including charcoal odour filter
- Condensing heat exchanger for oven vent condensing and reduced heat emissions
- Self contained condensate collection – no connection to waste drain required
- Oven Hood interlock control
- Automatic 2 speed extraction fans - reduced noise/energy
- SEED certified for installation without an extraction canopy in most situations

VHIK32 INSTALLATION KIT

- Supplied standard with Hood
- Requires mechanical and electrical field assembly for connection of Hood to Oven

ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK32 Oven Stand
- #H11715 Replacement Charcoal Filter for VH32

VH32

Unit shall be a Halton Ventless Condensing Hood, UL listed and UL EPH classified. The unit shall have all stainless steel construction, include 3 stage filtration and incorporate a condensing heat exchanger. Unit will feature an automatic 2 speed extraction fan with interlocked oven operation, Unit shall be 220-240V and fitted with a 10A plug cordset. Unit shall be provided with VHIK32 Installation Kit for connection and fitment to Moffat Turbofan Convection Oven models E32D4, E32D5, E32T4, E32T5.

VHIK32 Installation Kit

Installation Kit shall be provided with VH32 Ventless Condensing Hood. Installation kit shall include: Wire harness for oven interlock connection to oven controls. Four 100mm oven feet and condensate collection pan and housing for self-contained condensate collection. Oven rear shroud for protection of interlock control harness and condensate drain tube. Oven to stand rear securing plate when oven is fitted on a Moffat Turbofan SK32 Stand.

Halton VH Series Ventless Condensing Hoods are manufactured by Halton Company, USA, exclusively for Moffat Turbofan Convection Ovens.

E32D4 Full Size Digital / Electric Convection Oven

CONTROLS

Electronic controls with Digital Time and Temperature display, Manual or Program modes
Moisture injection key (5 levels)
Thermostat range 50-260°C
Timer range from 180 minutes in countdown mode
Timer range up to 999 minutes in time count mode for holding, slow cooking
Optional Core Probe temperature range 50-90°C

SPECIFICATIONS

Electrical Requirements
230-240V, 50Hz, 1P+N+E, 6.5kW, 27A
No cordset supplied

Water Requirements (optional)

Cold water connection 3/4" BSP male
80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions (E32D4)

Width 735mm
Height 730mm including 76mm feet
Depth 810mm

Oven Rack Dimensions

Width 460mm
Depth 660mm

Nett Weight (E32D4)

89kg

Packing Data (E32D4)

105kg
0.57m³
Width 760mm
Height 815mm
Depth 925mm

VH32 Ventless Condensing Hood

Including VHIK32 Installation Kit

CONTROLS

Illuminated Power switch
Oven interlocked control

SPECIFICATIONS

Electrical Requirements
220-240V, 50-60hz, 1-phase, 1.0A
10A plug 1.8M cordset fitted

Water Requirements

No water connection required

Drain Requirements – Optional

Hood water condensate can be taken to a water waste drain if desired. A 1800mm long 3/8" OD drain hose is supplied with hood.

External Dimensions (VH32 Ventless Hood)

Width: 742mm
Height: 368mm
Depth: 1017mm
Allow 76mm rear clearance

Nett Weight (VH32 Ventless Hood)

46.5 kg

Packing Data (VH32 Ventless Hood)

57 kg
0.7 m³
Width 800mm
Height 545mm
Depth 1120mm

SK32 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E32D, E32T and G32D Series ovens

6 position tray runners standard
76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel
Supplied CKD for assembly on site

External Dimensions (SK32 Oven Stand)

Width 735mm
Height 880mm
Depth 827mm

Nett Weight (SK32 Oven Stand)

18.5kg

Packing Data (SK32 Oven Stand)

23kg
0.14m³
Width 840mm
Height 805mm
Depth 210mm

INSTALLATION CLEARANCES

Rear 50mm
LH Side 50mm
RH Side* 75mm

* For fixed installations a minimum of 500mm is required for service

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required



Australia
www.moffat.com.au
New Zealand
www.moffat.co.nz
www.turbofanoven.com

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +61 3-9518 3888
Facsimile +61 3-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +61 2-8833 4111
nswsales@moffat.com.au

South Australia
Telephone +61 3-9518 3888
vsales@moffat.com.au

Queensland
Telephone +61 7-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone +61 8-9413 2400
wasales@moffat.com.au

New Zealand
Moffat Limited

Christchurch
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz




Designed and manufactured by
MOFFAT

ISO9001
All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.TFN.S.2201

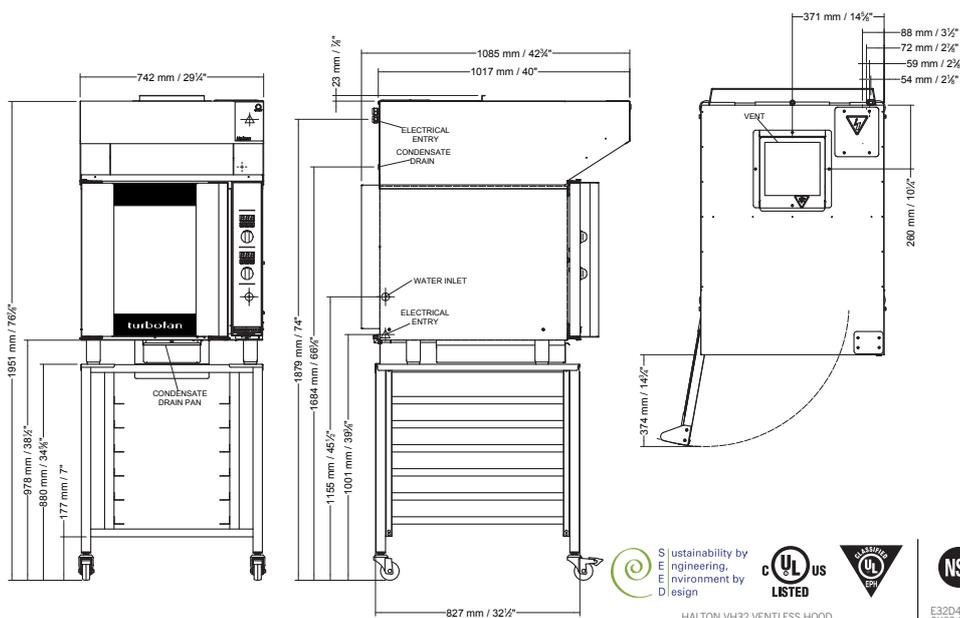

E32D4 OVEN
SK32 STAND

an Ali Group Company



The Spirit of Excellence