

Technical data sheet for

**E32T4 ON THE SK32 STAND**Full Size Electric Convection Oven  
TOUCH SCREEN CONTROL on a Stainless Steel StandE32T4  
OVEN**t****E32T4**

Unit shall be a Moffat electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for four full size sheet pans. The oven shall have selectable moisture level injection and a 2 speed oven fan. The oven shall be controlled by a 5.7" Touch Screen control with manual and recipe operating modes with icon driven recipe programs and individual shelf control operation mode and multiple stage cooking. Oven controller shall have USB port for recipe file uploading and downloading. A core temperature probe M236060 is optional. The unit shall include dual halogen oven lamps. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK32. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

**SK32**

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E32D and G32D. Unit shall be supplied in 100% recyclable shipping packaging.

**STANDARD FEATURES**

- 4 18" x 26" / 460 x 660 full size sheet pan capacity
- 4 600 x 400 tray capacity
- 110mm tray spacing
- Compact 735mm width
- Touch Screen control
- Program and manual modes
- Icon driven program menu
- Multiple stage cooking
- Individual shelf control and shelf timers
- Auto-Start mode
- Energy Save Set-Back mode
- Straight or Flex cooking time
- Core probe cooking (optional Core probe Kit)
- USB port for program/icon updating
- Moisture injection mode (5 levels)
- 2 speed bi-directional reversing fan system
- 6.3kW heating power
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Stay-Cool door handle
- Vitreous enamel oven chamber
- Push fit continuous oven door seal (no tools)
- Dual halogen oven lamps
- Anti-skid 50mm dia.76mm high adjustable stainless steel feet
- 4 oven wire racks supplied
- 100% recyclable packaging

**ACCESSORIES**

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK32 Oven Stand
- DSK32 Double Stacking Kit

**30T SERIES****E32T4/2****E32T4/2C****E32T4 Full Size Convection Oven  
TOUCH SCREEN CONTROL****CONSTRUCTION**

Vitreous enamel fully welded oven chamber  
Stainless steel front, sides and top exterior  
Stainless steel oven fan baffle and oven vent  
Removable 4 position stainless steel side racks  
Oven racks chrome plated wire (4 supplied)  
Stainless steel frame side hinged door  
5mm thick door outer glass  
5mm thick low energy loss door inner glass  
Full stainless steel welded door handle  
Stainless steel control panel  
Aluminised coated steel base and rear panels

**CONTROLS**

5.7" LED backlit touch screen  
Icon driven program menu  
BMP image icon imports via USB port  
Program updates via USB port  
Temperature range 30 - 260°C  
Adjustable sounder tones and volume  
Other specification on request  
Safety thermostat cut-out  
Optional core temp probe

**CLEANING**

Stainless steel top and side exterior panels  
Vitreous enamel oven chamber  
Fully removable stainless steel oven side racks  
Removable stainless steel oven fan baffle  
Easy clean door system with hinge out door inner glass (no tools required)  
Removable plug-in oven door seal (no tools required)

**SPECIFICATIONS**

Electrical Requirements  
230-240V, 50Hz, 1P+N+E, 6.5kW, 27A  
No cordset supplied

Water Requirements (optional)  
Cold water connection 3/4" BSP male

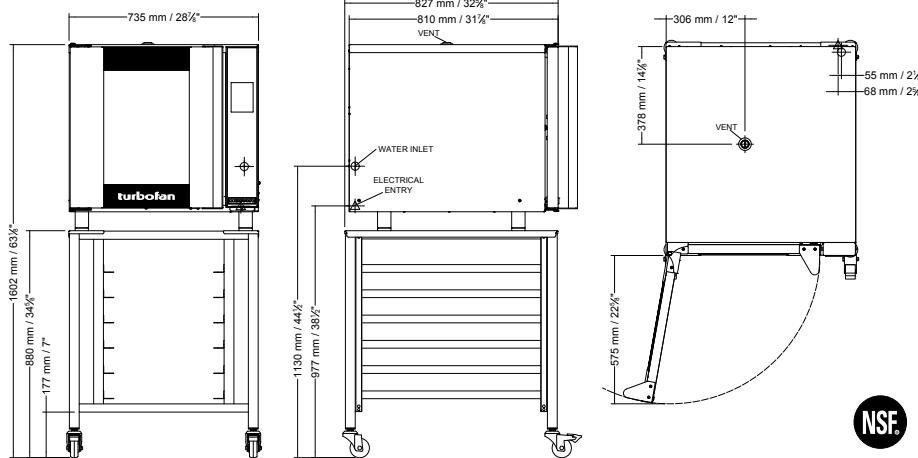
80psi maximum inlet pressure / 20psi minimum inlet pressure

**External Dimensions**

Width 735mm  
Height 730mm including 76mm feet  
Depth 810mm

**Oven Internal Dimensions**

Width 465mm  
Height 515mm  
Depth 700mm  
Volume 0.17m³

**Oven Rack Dimensions**

Width 460mm  
Depth 660mm

**Nett Weight (E32T4)**

89kg

**Packing Data (E32T4)**

105kg  
0.57m³

Width 760mm

Height 815mm

Depth 925mm

**SK32 Stainless Steel Stand**

All stainless steel welded frame oven stand for Turbofan E32D, E32T and G32D Series ovens

6 position tray runners standard

76mm diameter wheel swivel castors standard with 2 front

castors with dual swivel and wheel

Welded 38mm and 32mm square tube front and rear

frames

Welded rack supports/side frames

4 dia. 76mm swivel castors with 2 front castors dual wheel and swivel lock

Top frame oven supports suit Turbofan E32D, E32T and G32D

Series oven mounting

Supplied CKD for assembly on site

**External Dimensions (SK32 Oven Stand)**

Width 735mm

Height 880mm

Depth 827mm

**Nett Weight (SK32 Oven Stand)**

18.5kg

**Packing Data (SK32 Oven Stand)**

23kg

0.14m³

Width 840mm

Height 805mm

Depth 210mm

**INSTALLATION CLEARANCES**

Rear 50mm

LH Side 50mm

RH Side\* 75mm

\* For fixed installations a minimum of 500mm is required for service

**CLEARANCE FROM SOURCES OF HEAT**

A minimum distance of 300mm from the appliance sides is required

**Australia**[www.moffat.com.au](http://www.moffat.com.au)**New Zealand**[www.moffat.co.nz](http://www.moffat.co.nz)[www.turbofanoven.com](http://www.turbofanoven.com)**Australia****Moffat Pty Limited**

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +61 3-9518 3888

Facsimile +61 3-9518 3833

vsales@moffat.com.au

New South Wales

Telephone +61 2-8833 4111

nswsales@moffat.com.au

South Australia

Telephone +61 3-9518 3888

vsales@moffat.com.au

Queensland

Telephone +61 7-3630 8600

qldsales@moffat.com.au

Western Australia

Telephone +61 8-9413 2400

wasales@moffat.com.au

**New Zealand****Moffat Limited**

Christchurch

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150

sales@moffat.co.nz



Designed and manufactured by

**ISO9001**

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.TFN.S.2601

an Ali Group Company



The Spirit of Excellence