

Technical data sheet for

E35D6-26 DOUBLE STACKED

Full Size Digital / Electric Convection Ovens
Double Stacked on a Stainless Steel Base Stand



E35D6-26/2 E35D6-26/2C

E35D6 ovens shall be Moffat electrically heated Turbofan convection ovens E.T.L. listed and NSF-4 listed. The ovens shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Ovens shall have capacity for six full size sheet pans each. The ovens shall be controlled by electronic controls having separate digital displays and adjusting knobs for time and temperature functions. The oven controls shall allow both manual with programmable moisture level injection and 2 speed oven fan. A core temperature probe is optional. The units shall include dual halogen oven lamps. Ovens shall be double stacked using Double Stacking Kits DSKE35 (adjustable feet option) or DSKE35C (castor option). Units shall be supplied in 100% recyclable shipping packaging.

Double stack models are supplied as two individual ovens and a double stacking kit for field assembly.

E35D6-26/2 - Double stack with adjustable feet base stand
E35D6-26/2C - Double stack with castor base stand

DOUBLE STACK FEATURES

- Two 6 full size sheet pan capacity ovens
- 35 $\frac{7}{8}$ " / 910mm width
- Full stainless steel base stand
- Full stainless steel oven spacer frame
- Adjustable feet or castor models
- Guard rail for bottom oven

STANDARD FEATURES

- 6 full size sheet pan capacity
- 4 $\frac{1}{8}$ " / 105mm tray spacing
- Digital display Time and Temperature Controls
- Large easy view $\frac{3}{4}$ " / 20mm high displays
- Electronic thermostat control
- Electronic timer with countdown or time count modes
- Manual mode and Program mode
- 30 programs with 3 stage cooking and stage end alarms
- Core Probe program cooking (optional Core Probe Kit)
- Steam injection mode (5 levels) and manual injection
- 2 speed bi-directional reversing fan system
- 12kW heating (220-240V) / 10.7kW heating (208V)
- Oven vent - Program and manual control
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Slam-shut / Pendulum door latch
- Porcelain enameled oven chamber
- Plug-in continuous oven door seal
- Dual halogen oven lamps

OPTIONS

- Single Phase model oven (specify when ordering)
- Oven racks chrome plated wire

ACCESSORIES

- Optional M236060 Core Temperature Probe Kit

E35D6-26/2 E35D6-26/2C Full Size Digital / Electric Convection Ovens Double Stacked on a Stainless Steel Base Stand

CONSTRUCTION - OVENS

Porcelain enameled fully welded oven chamber
Stainless steel front, sides and top exterior
Stainless steel oven fan baffle and oven vent
Removable 6 position stainless steel side racks
Stainless steel frame side hinged door
0.2" / 5mm thick door outer glass
0.2" / 5mm thick low energy loss door inner glass
Full stainless steel welded door handle
Stainless steel control panel
Aluminized coated steel base and rear panels

CONSTRUCTION - DOUBLE STACKING KIT

All stainless steel construction
Welded 1½" and 1¼" square tube front and rear frame
base stand
4 adjustable feet on E35D6-26/2
4 dia. 3" / 76mm swivel castors with 2 front castors dual wheel
and swivel lock on E35D6-26/2C
Stainless steel oven spacer frame
Stainless steel bottom oven vent extension

CONTROLS (each oven)

Electronic controls with Digital Time and Temperature display,
Manual or Program modes
Large ¾" / 20mm high LED displays
Two individual time and temperature setting control knobs
6 function keys
Fan LO speed key
Timer Start/Stop key
Steam Injection key (5 levels)
Programs select key
Vent open/close key
Actual temperature display key
Adjustable buzzer/alarm volume
Thermostat range 150-500°F / 50-260°C
Timer range from 180 minutes in countdown mode
Timer range up to 999 minutes in time count mode for holding,
slow cooking
Over-temperature safety cut-out

CLEANING

Stainless steel top and side exterior panels
Porcelain enameled oven chamber
Fully removable stainless steel oven side racks
Removable stainless steel oven fan baffle
Easy clean door system with hinge out door inner glass
(no tools required)
Removable plug-in oven door seal (no tools required)

SPECIFICATIONS (each oven)

208V, 60Hz, 1-phase, 11.2kW, 54A
208V, 60Hz, 3-phase, 11.2kW, 31A / ph
220-240V, 60Hz, 1-phase, 12.5kW, 52A
220-240V, 60Hz, 3-phase, 12.5kW, 30A / ph
No cordset supplied

Water Requirements (optional - each oven)

Cold water connection ¾" GHT male
80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions

Width 35⁷/₈" / 910mm
Height 77¹/₂" / 1968mm
Depth 36⁷/₈" / 923mm

Oven Internal Dimensions (each oven)

Width 18¹/₄" / 465mm
Height 28" / 710mm
Depth 27¹/₂" / 700mm
Volume 8ft³ / 0.23m³

Oven Rack Dimensions

Width 18" / 460mm
Depth 26" / 660mm

Nett Weight (double stack complete)

633lbs / 287kg

Packing Data (E35D6-26 ovens each)

359lbs / 163kg
37.7ft³ / 1.07m³
Width 37³/₈" / 950mm
Height 37¹/₂" / 960mm
Depth 46" / 1170mm

Packing Data (Stacking Kit)

35lbs / 16kg (DSK35-26 - adjustable feet)
41lbs / 19kg (DSK35C-26 - castor)
4.1ft³ / 0.12m³
Width 30³/₈" / 770mm
Height 35" / 890mm
Depth 6³/₄" / 170mm

Supplied CKD for assembly on site

INSTALLATION CLEARANCES

Rear 2" / 50mm
LH Side 2" / 50mm
RH Side* 2" / 50mm

* For fixed installations a minimum of 20" / 500mm is required for service

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is required

Double Stacking Kits


For after market double stacking two E35D6-26 convection ovens
DSK35-26 - Double stacking kit - adjustable feet
DSK35C-26 - Double stacking kit - castor



www.blue-seal.ca
www.turbofanoven.com
www.servecanada.com

CANADA

Serve Canada
40 East Pearce Street
Richmond Hill ON
L4B 1B7
Ph Toll Free 800-263-1455
Fax 905-731-7687
Email info@servecanada.com

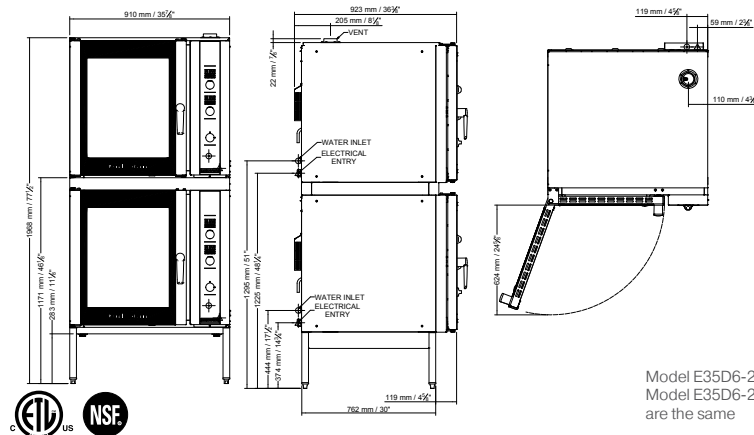

Model E35D6-26/2 shown
Model E35D6-26/2C dimensions
are the same

Manufactured by:
Moffat Limited
45 Illinois Drive, Izone Business Hub
Rolleston 7675, New Zealand



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
CA.TFN.S.2301

an Ali Group Company



The Spirit of Excellence