

Technical data sheet for

E35D6-26 OVEN / VH35-26 VENTLESS HOOD ON THE SK35 STAND

Full Size Digital / Electric Convection Oven with
Halton Ventless Condensing Hood on a Stainless Steel Stand



E35D6-26

Unit shall be a Blue Seal electrically heated Turbofan Convection Oven E.T.L. listed and NSF-4 listed. The oven shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for 6 full size sheet pans. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes with programmable steam level injection and 2 speed oven fan. A core temperature probe M236060 is optional. The unit shall include dual halogen oven lamps. Oven shall be able to be bench mounted on 3" / 76mm feet or mounted on oven stand model SK35. Unit shall be supplied in 100% recyclable shipping packaging.

SK35

Unit shall be a Blue Seal Turbofan stainless steel oven stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with and support Turbofan Convection Oven models E35D6 and E35T6. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 6 full size sheet pan capacity
- 4¹/₈" / 105mm tray spacing
- 35⁷/₈" / 910mm width
- Digital display Time and Temperature Controls
- USB port for programs
- 30 programs with 3 stage cooking and stage end alarms
- Core Probe program cooking (optional Core Probe Kit)
- Steam injection mode (5 levels) and manual injection
- 2 speed bi-directional reversing fan system
- 12kW heating (220-240V) / 10.7kW heating (208V)
- Safe-Touch vented side hinged door
- Porcelain enameled oven chamber

STANDARD FEATURES – VENTLESS CONDENSATION HOOD

- Removes need for installation under canopy or ducted oven hood
- Complies with EPA202 test method for less than <5mg/ m³ grease laden effluent limits
- 3 stage filtering including charcoal odour filter
- Condensing heat exchanger for oven vent condensing and reduced heat emissions
- Self contained condensate collection – no connection to waste drain required
- Oven Hood interlock control
- Two automatic 2 speed extraction fans - reduced noise/ energy

VHIK35 INSTALLATION KIT

- Supplied standard with Hood
- Requires mechanical and electrical field assembly for connection of Hood to Oven

ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK35 Oven Stand
- Optional oven wire racks
- #H11790 Replacement Charcoal Filter for VH35

VH35-26

Unit shall be a Halton Ventless Condensing Hood, UL listed and UL EPH classified. The unit shall have all stainless steel construction, include 3 stage filtration and incorporate a condensing heat exchanger. Unit will feature Two automatic 2 speed extraction fans with interlocked oven operation, Unit shall be 110-120V and fitted with a NEMA 5-15P cordset. Unit shall be provided with VHIK35 Installation Kit for connection and fitment to Blue Seal Turbofan Convection Oven model E35D6-26 E35T6-26.

VHIK35 Installation Kit

Installation Kit shall be provided with VH35-26 Ventless Condensing Hood. Installation kit shall include: Four 4" (100mm) oven feet and condensate collection pan and housing for self-contained condensate collection. Oven to stand rear securing plate when oven is fitted on a Blue Seal Turbofan SK35 Stand.

Halton VH Series Ventless Condensing Hoods are manufactured by Halton Company, USA, exclusively for Blue Seal Turbofan Convection Ovens.

E35D6-26 Full Size Digital / Electric Convection Oven

CONTROLS

Electronic controls with Digital Time and Temperature display, Manual or Program modes
 Steam injection key (5 levels)
 Thermostat range 150-500°F / 50-260°C
 Timer range from 180 minutes in countdown mode
 Timer range up to 999 minutes in time count mode for holding, slow cooking

SPECIFICATIONS

Electrical Requirements
 208V, 60Hz, 1-phase, 11.2kW, 54A
 208V, 60Hz, 3-phase, 11.2kW, 31A / ph
 220-240V, 60Hz, 1-phase, 12.5kW, 52A
 220-240V, 60Hz, 3-phase, 12.5kW, 30A / ph
 No cordset supplied

Water Requirements (optional)

Cold water connection 3/4" GHT male
 80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions (E35D6-26)

Width 35 7/8" / 910mm
 Height 34 1/4" / 871mm including 3" / 76mm feet
 Depth 36 7/8" / 923mm

Oven Rack Dimensions

Width 18" / 460mm
 Depth 26" / 660mm

Nett Weight (E35D6-26)

302lbs / 137kg

Packing Data (E35D6-26)

359lbs / 163kg
 37.7ft³ / 1.07m³
 Width 37 7/8" / 950mm
 Height 37 1/2" / 960mm
 Depth 46" / 1170mm

VH35-26 Ventless Condensing Hood Including VHIK35 Installation Kit

CONTROLS

Illuminated Power switch
 Oven interlocked control

SPECIFICATIONS

Electrical Requirements
 110-120V, 60hz, 1-phase, 1.0A
 NEMA 5-15P 6ft cordset fitted

Water Requirements

No water connection required



Drain Requirements – Optional

Hood water condensate can be taken to a water waste drain if desired. A 6ft / 1800mm long 3/8"OD drain hose is supplied with hood.

External Dimensions (VH35-26 Ventless Hood)

Width: 36 1/8" / 918mm
 Height: 14 3/8" / 364mm
 Depth: 41" / 1042mm
 Allow 3" / 76mm rear clearance

Nett Weight (VH35-26 Ventless Hood)

170 lbs / 77.0 kg

Packing Data (VH35-26 Ventless Hood)

190lbs / 68 kg
 21.3ft³ / 0.60 m³
 Width: 38" / 965mm
 Height: 21 1/2" / 545mm
 Depth: 45" / 1145mm

SK35 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E35D, E35T Series ovens
 6 position tray runners standard
 3" / 76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel lock
 Supplied CKD for assembly on site

External Dimensions (SK35 Oven Stand)

Width 35 7/8" / 910mm
 Height 34 5/8" / 880mm
 Depth 32 1/2" / 827mm

Nett Weight (SK35 Oven Stand)

54lbs / 24kg

Packing Data (SK35 Oven Stand)

59lbs / 27kg
 4.4ft³ / 0.13m³
 Width 37 5/8" / 960mm
 Height 32" / 815mm
 Depth 61 3/8" / 160mm

INSTALLATION CLEARANCES

Rear 2" / 50mm
 LH Side 2" / 50mm
 RH Side* 2" / 50mm

* For fixed installations a minimum of 20" / 500mm is required for service

CLEARANCE FROM SOURCES OF HEAT


A minimum distance of 12" / 300mm from the appliance sides is required



www.blue-seal.ca
 www.turbofanoven.com
 www.servecanada.com

CANADA

Serve Canada
 40 East Pearce Street
 Richmond Hill ON
 L4B 1B7
 Ph Toll Free 800-263-1455
 Fax 905-731-7687
 Email info@servecanada.com

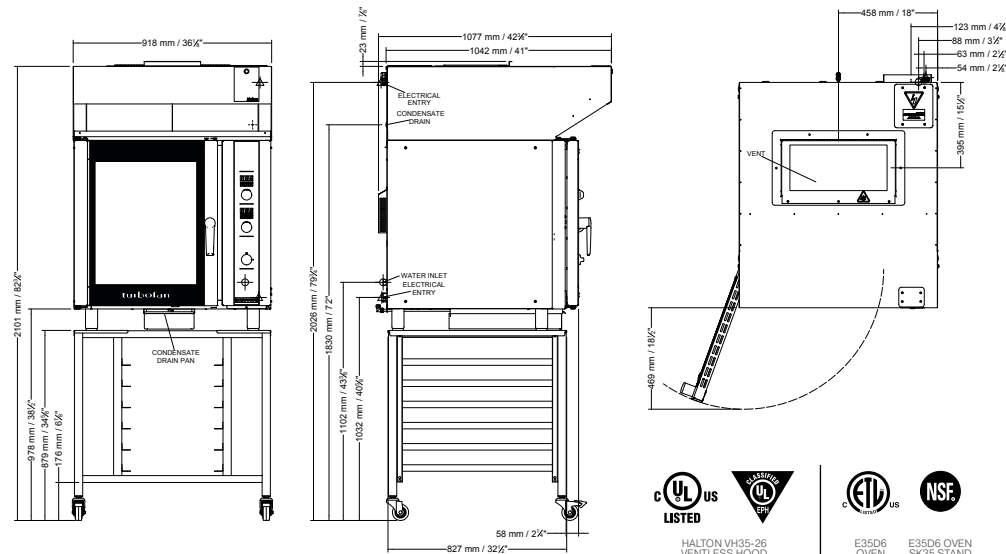

HALTON VH35-26 VENTLESS HOOD

E35D6 OVEN

E35D6 OVEN SK35 STAND

Manufactured by:
 Moffat Limited
 45 Illinois Drive, Izone Business Hub
 Rolleston 7675, New Zealand



ISO9001
 Quality Management Standard

Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
 CA.TFN.S.2301

an Ali Group Company



The Spirit of Excellence