

SINGLE PAN ELECTRIC FRYER 600mm

E60

- 22kW high performance single pan fryer
- Easy clean flat bar heating elements
- Easy clean stainless steel open pan with 10 year limited warranty
- 35L oil capacity
- 3 standard or 2 large basket capacity
- Electronic thermostat
- 32mm (1¼") drain valve
- Rear rollers
- Stainless steel exterior
- Easy service
- Fully modular



E60

Overall Construction

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.2mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Vitreous enamelled control panel
- Hinge out counterbalanced heating elements
- 32mm (1¼") drain valve
- 63mm dia. heavy-duty 1.2mm 304 stainless steel adjustable legs at front and two rollers at rear
- 3 standard baskets and stainless steel lid supplied standard

Controls

- Electronic thermostat
- Thermostat range 90-190°C
- Large easy use control with easy view scale
- Fail-safe over-temperature safety cut-out
- Element tilt switch for heating cut-out on element lift
- Indicator lights for power and heating
- Safety start switch

Cleaning and Servicing

- Open stainless steel pan with hinge out elements for easy clean
- Easy clean basket support bar
- 32mm (1¼") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all controls from front of unit

SINGLE PAN GAS FRYER 600mm

E60

Specifications

Production rate
40kg/hr

Pan Size
Oil capacity 35L (50lbs shortening)
Width 515mm
Length 390mm
Oil frying depth 95mm

Baskets
3 nickel plated wire baskets
140mm W x 335mm D x 145mm H
Optional 2 nickel plated wire baskets
210mm W x 335mm D x 145mm H

Elements
2 x 11kW flat bar stainless steel
heating elements

Electrical requirements
22kW, 400-415Vac, 50/60Hz, 3P+N+E
L1 30.5A
L2 30.5A
L3 30.5A

Electrical connection
41mm from RH side, 70mm from rear
and 485mm from floor


Dimensions
Width 600mm
Depth 812mm
Height 915mm
Incl. splashback 1085mm

Nett weight
74kg

Packing data
0.7m³, 99kg
Width 670mm
Depth 900mm
Height 1255mm

Options
Adjustable feet at rear
Filtamax Filtration System
Extra standard baskets
Extra large baskets
Side splash guards
Joining caps
Castors

E60

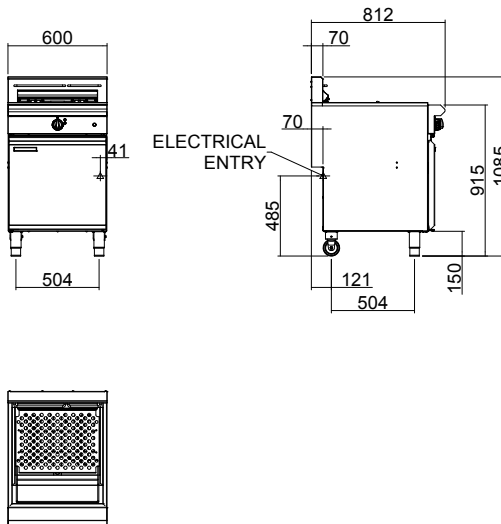

www.blue-seal.co.uk

United Kingdom
blue-seal.co.uk
Blue Seal Limited
Unit 67
Gravelly Business Park
Gravelly
Birmingham B24 8TQ
England
Telephone 0121-327 5575
Facsimile 0121-327 9711
sales@blue-seal.co.uk

Australia
moffat.com.au
Moffat Pty Limited
740 Springvale Road
Mulgrave
Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand
moffat.co.nz
Moffat Limited
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

International
moffat.com
international@moffat.co.nz



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Blue Seal products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



Copyright Moffat Ltd.
UK.BS.01.23

an Ali Group Company



The Spirit of Excellence