

Technical data sheet for

## **EHT10-L HUMIDIFIED HOLDING CABINET ON THE SKEHT10 STAND**

10 Tray Electric Humidified Holding Cabinet TOUCH CONTROL  
on a Stainless Steel Stand



### **EHT10-L**

Unit shall be a Moffat electrically heated Turbofan Humidified Holding Cabinet. NSF4 listed. The holding cabinet shall have double skin construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged. Unit shall have capacity for 10 1/1GN pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a 5.7" Touch Screen control with individual shelf timers and cabinet temperature control and humidity level control. Holding Cabinet shall operate independently or in conjunction with Moffat Turbofan E33T Convection Oven. Holding Cabinet shall be fitted with a 10A cordset.

### **SKEHT10**

Unit shall be a Moffat Turbofan stainless steel stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 5 tray runners suitable for up to 5 1/1 GN pans. The stand shall be fully compatible with, and support, Turbofan EHT10 Humidified Holding Cabinet. Unit shall be supplied in 100% recyclable shipping packaging.

### **STANDARD FEATURES**

- Designed for individual use or system installed with Turbofan E33T Convection Ovens
- 10 1/1GN pan capacity
- 74mm tray spacing
- Compact 610mm width
- Full viewing field reversible door
- 220-240V 10A plug-in cordset fitted
- 1600W cabinet heating
- Full double skin construction
- Touch Screen Control
- Individual shelf timers
- Electronic temperature control
- 600W heated humidification water tank
- Electronic humidity tank temperature control
- Autofill water tank system
- Continuous door seal
- Low velocity circulation fan system
- Dual LED halogen cabinet interior lamps
- 100% recyclable packaging

### **ACCESSORIES - INCLUDED**

- Two 145mm rear standoffs included
- 3M Cuno water filter kit complete with cartridge and connection fittings

### **ACCESSORIES - OPTIONAL**

- 1/1 GN non-stick wire baskets
- Turbofan SKEHT10 Holding Cabinet stand
- 237472 Stacking Kit E33 Oven - EHT10 Cabinet

#### EHT10-L 1/1 GN Electric Humidified Holding Cabinet Touch Control

##### CONSTRUCTION

304 stainless steel interior cabinet  
Stainless steel front, sides and top exterior  
Stainless steel interior side racks  
Stainless steel frame, side hinged door  
5mm thick door glass  
Stainless steel control panel  
Stainless steel base and rear panels

##### CONTROLS

5.7" LED backlit touch screen  
Individual shelf timers  
Temperature range 20- 90°C  
Humidity temp control

##### CLEANING

Stainless steel top and side exterior panels  
Removable plug-in door seal (no tools required)

##### SPECIFICATIONS

###### Electrical Requirements

220-240V, 60hz, 1-phase, 2.3kW, 9.6A  
220-240V, 50hz, 1-phase, 2.3kW, 9.6A  
10A cordset fitted

###### Water Requirements

Cold water connection ¾" BSP male  
80psi / 550kpa maximum inlet pressure  
22psi / 150kpa minimum inlet pressure

###### External Dimensions (EHT10-L)

Width 610mm  
Height 1015mm including dia. 76mm castors  
Depth 680mm  
825mm including Rear Standoffs

###### Nett Weight (EHT10-L)

188kg

##### Packing Data (EHT10-L)

122kg  
0.71m<sup>3</sup>  
Width 700mm  
Height 1170mm  
Depth 865mm

#### SKEHT10 Stainless Steel Stand

All stainless steel welded frame oven stand for  
Turbofan EHT10 Humidified Holding Cabinet  
5 position tray runners standard  
Welded 38mm and 32mm square tube  
front and rear frames  
Welded rack supports/side frames  
76mm diameter swivel castors standard with  
2 front castors wheel and swivel lock  
Supplied CKD for assembly on site

##### External Dimensions (SKEHT10 Stand)

Width 610mm  
Height 608mm  
Depth 726mm

##### Nett Weight (SKEHT10 Stand)

18kg

##### Packing Data (SKEHT10 Stand)

20.5kg  
0.10m<sup>3</sup>  
Width 755mm  
Height 795mm  
Depth 160mm

##### INSTALLATION CLEARANCES

Rear 145mm including Rear Standoffs  
LH Side 0mm  
RH Side 25mm

##### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance  
sides is required



moффat.com.au

moффat.co.nz

moффat.com

turbofanoven.com

##### Australia

##### Moffat Pty Limited

740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +61 3-9518 3888  
Facsimile +61 3-9518 3833  
vsales@moffat.com.au  
moffat.com.au

##### New Zealand

##### Moffat Limited

Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz  
moffat.co.nz

##### International

##### Moffat Limited

Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
international@moffat.co.nz  
moffat.com



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by




##### ISO9001

All Turbofan products are designed and  
manufactured by Moffat using the  
internationally recognised ISO9001  
quality management system, covering  
design, manufacture and final inspection,  
ensuring consistent high quality at all times.

In line with policy to continually develop  
and improve its products, Moffat Limited  
reserves the right to change specifications  
and design without notice.

© Copyright Moffat Ltd  
1688 NZAU\_IN.TFN.S.21.01

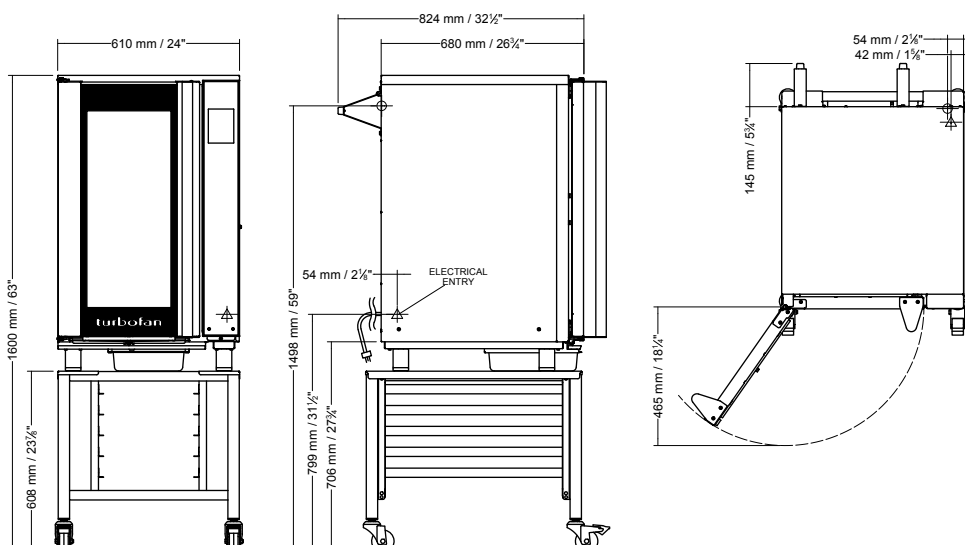

an Ali Group Company



The Spirit of Excellence