

Technical data sheet for

## EHT10-L HUMIDIFIED HOLDING CABINET ON THE SKEHT10 STAND

10 Tray Electric Humidified Holding Cabinet TOUCH CONTROL  
on a Stainless Steel Stand



### EHT10-L

Unit shall be a Blue Seal electrically heated Turbofan Humidified Holding Cabinet. E.T.L listed and NSF4 listed. The holding cabinet shall have double skin construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged. Unit shall have capacity for 10 half size sheet pans or 10 1/1GN or 12" x 20" steam pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a 5.7" Touch Screen control with individual shelf timers and cabinet temperature control and humidity level control. Holding Cabinet shall operate independently or in conjunction with Blue Seal Turbofan E33T Convection Oven. Holding Cabinet shall be fitted with a NEMA 6-15P cordset.

### SKEHT10

Unit shall be a Blue Seal Turbofan stainless steel stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 5 tray runners suitable for up to 5 half size sheet pans or 5 12" x 20" steam pans. The stand shall be fully compatible with, and support, Turbofan EHT10 Humidified Holding Cabinet. Unit shall be supplied in 100% recyclable shipping packaging.

### STANDARD FEATURES

- Designed for individual use or system installed with Turbofan E33T Convection Ovens
- 10 Half size sheet pan capacity
- 10 1/1GN / 12" x 20" steam pan capacity
- 2<sup>7</sup>/<sub>8</sub>" / 74mm tray spacing
- Compact 24" / 610mm width
- Full viewing field reversible door
- 208V or 220-240V plug-in 15A NEMA 6-15P cordset fitted
- 1600W cabinet heating
- Full double skin construction
- Touch Screen Control
- Individual shelf timers
- Electronic temperature control
- 600W heated humidification water tank
- Electronic humidity tank temperature control
- Autofill water tank system
- Continuous door seal
- Low velocity circulation fan system
- Dual LED halogen cabinet interior lamps
- 100% recyclable packaging

### ACCESSORIES - INCLUDED

- Two 5<sup>3</sup>/<sub>4</sub>" / 145mm rear standoffs included
- 3M Cuno water filter kit complete with cartridge and connection fittings

### ACCESSORIES - OPTIONAL

- 12" x 20" non-stick wire baskets
- Turbofan SKEHT10 Holding Cabinet stand
- M237472 Stacking Kit E33 Oven - EHT10 Cabinet

#### EHT10-L 1/1 GN Electric Humidified Holding Cabinet Touch Control

##### CONSTRUCTION

304 stainless steel interior cabinet  
Stainless steel front, sides and top exterior  
Stainless steel interior side racks  
Stainless steel frame, side hinged door  
0.2"/5mm thick door glass  
Stainless steel control panel  
Stainless steel base and rear panels

##### CONTROLS

5.7" LED backlit touch screen  
Individual shelf timers  
Temperature range 68-194°F / 20- 90°C  
Humidity temp control

##### CLEANING

Stainless steel top and side exterior panels  
Removable plug-in door seal (no tools required)

##### SPECIFICATIONS

###### Electrical Requirements

208V, 60hz, 1-phase, 2.3kW, 11.1A  
220-240V, 60hz, 1-phase, 2.3kW, 9.6A  
NEMA 6-15P cordset fitted

###### Water Requirements

Cold water connection ¾" GHT male  
80psi / 550kpa maximum inlet pressure  
22psi / 150kpa minimum inlet pressure

###### External Dimensions (EHT10-L)

Width 24" / 610mm  
Height 40" / 1015mm including dia. 3" / 76mm castors  
Depth 26¾" / 680mm  
32½" / 825mm including Rear Standoffs

###### Nett Weight (EHT10-L)

194 lbs / 88kg

##### Packing Data (EHT10-L)

269 lbs / 122kg  
25 ft<sup>3</sup> / 0.71m<sup>3</sup>  
Width 27 ½" / 700mm  
Height 46 ½" / 1170mm  
Depth 34" / 865mm

##### SKEHT10 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan EHT10 Humidified Holding Cabinet  
5 position tray runners standard  
Welded 1½" / 38mm and 1¼" / 32mm square tube front and rear frames  
Welded rack supports/side frames  
3" / 76mm diameter swivel castors standard with 2 front castors wheel and swivel lock  
Supplied CKD for assembly on site  
External Dimensions (SKEHT10 Stand)


Width 24" / 610mm  
Height 23 7/8" / 608mm  
Depth 28 5/8" / 726mm  
Nett Weight (SKEHT10 Stand)  
40lbs / 18kg  
Packing Data (SKEHT10 Stand)  
45lbs / 20.5kg  
3.53ft<sup>3</sup> / 0.10m<sup>3</sup>  
Width 29¾" / 755mm  
Height 31¼" / 795mm  
Depth 6¼" / 160mm

##### INSTALLATION CLEARANCES

Rear 5¾" / 145mm including Rear Standoffs  
LH Side 0" / 0mm  
RH Side 1" / 25mm

##### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is required

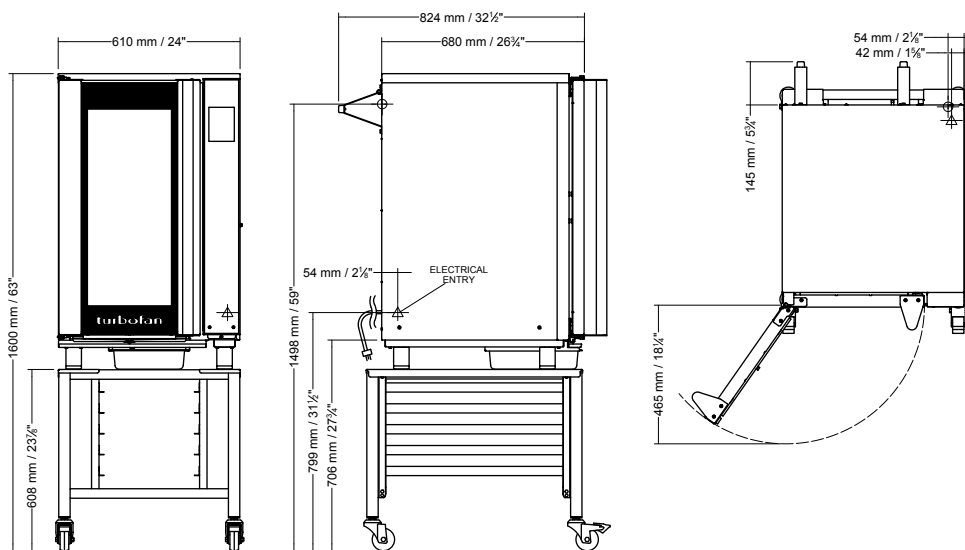

www.blue-seal.ca  
www.turbofanoven.com  
www.servecanada.com

##### CANADA

Serve Canada  
40 East Pearce Street  
Richmond Hill ON  
L4B 1B7  
Ph Toll Free 800-263-1455  
Fax 905-731-7687  
Email info@servecanada.com



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by



##### ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
1688 CA.TFN.S.21.01

