

Technical data sheet for

EHT10-L HUMIDIFIED HOLDING CABINET ON THE SKEHT10 STAND

10 Tray Electric Humidified Holding Cabinet TOUCH CONTROL
on a Stainless Steel Stand



EHT10-L

Unit shall be a Moffat electrically heated Turbofan Humidified Holding Cabinet. E.T.L listed and NSF4 listed. The holding cabinet shall have double skin construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged. Unit shall have capacity for 10 half size sheet pans or 10 1/1GN or 12" x 20" steam pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a 5.7" Touch Screen control with individual shelf timers and cabinet temperature control and humidity level control. Holding Cabinet shall operate independently or in conjunction with Moffat Turbofan E33T Convection Oven. Holding Cabinet shall be fitted with a NEMA 6-15P cordset.

SKEHT10

Unit shall be a Moffat Turbofan stainless steel stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 5 tray runners suitable for up to 5 half size sheet pans or 5 12" x 20" steam pans. The stand shall be fully compatible with, and support, Turbofan EHT10 Humidified Holding Cabinet. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- Designed for individual use or system installed with Turbofan E33T Convection Ovens
- 10 Half size sheet pan capacity
- 10 1/1GN / 12" x 20" steam pan capacity
- 2⁷/₈" / 74mm tray spacing
- Compact 24" / 610mm width
- Full viewing field reversible door
- 208V or 220-240V plug-in 15A NEMA 6-15P cordset fitted
- 1600W cabinet heating
- Full double skin construction
- Touch Screen Control
- Individual shelf timers
- Electronic temperature control
- 600W heated humidification water tank
- Electronic humidity tank temperature control
- Autofill water tank system
- Continuous door seal
- Low velocity circulation fan system
- Dual LED halogen cabinet interior lamps
- 100% recyclable packaging

ACCESSORIES - INCLUDED

- Two 5³/₄" / 145mm rear standoffs included
- 3M Cuno water filter kit complete with cartridge and connection fittings

ACCESSORIES - OPTIONAL

- 12" x 20" non-stick wire baskets
- Turbofan SKEHT10 Holding Cabinet stand
- M237472 Stacking Kit E33 Oven - EHT10 Cabinet

EHT10-L 1/1 GN Electric Humidified Holding Cabinet Touch Control

CONSTRUCTION

304 stainless steel interior cabinet
Stainless steel front, sides and top exterior
Stainless steel interior side racks
Stainless steel frame, side hinged door
0.2"/5mm thick door glass
Stainless steel control panel
Stainless steel base and rear panels

CONTROLS

5.7" LED backlit touch screen
Individual shelf timers
Temperature range 68-194°F / 20- 90°C
Humidity temp control

CLEANING

Stainless steel top and side exterior panels
Removable plug-in door seal (no tools required)

SPECIFICATIONS

Electrical Requirements

208V, 60hz, 1-phase, 2.3kW, 11.1A
220-240V, 60hz, 1-phase, 2.3kW, 9.6A
NEMA 6-15P cordset fitted

Water Requirements

Cold water connection ¾" GHT male
80psi / 550kpa maximum inlet pressure
22psi / 150kpa minimum inlet pressure

External Dimensions (EHT10-L)

Width 24" / 610mm
Height 40" / 1015mm including dia. 3" / 76mm castors
Depth 26¾" / 680mm
32½" / 825mm including Rear Standoffs

Nett Weight (EHT10-L)

194 lbs / 88kg

Packing Data (EHT10-L)

269 lbs / 122kg
25 ft³ / 0.71m³
Width 27 ½" / 700mm
Height 46 ½" / 1170mm
Depth 34" / 865mm

SKEHT10 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan EHT10 Humidified Holding Cabinet
5 position tray runners standard
Welded 1½" / 38mm and 1¼" / 32mm square tube front and rear frames
Welded rack supports/side frames
3" / 76mm diameter swivel castors standard with 2 front castors wheel and swivel lock
Supplied CKD for assembly on site
External Dimensions (SKEHT10 Stand)

Width 24" / 610mm
Height 23 7/8" / 608mm
Depth 28 5/8" / 726mm
Nett Weight (SKEHT10 Stand)
40lbs / 18kg

Packing Data (SKEHT10 Stand)


45lbs / 20.5kg
3.53ft³ / 0.10m³
Width 29¾" / 755mm
Height 31¼" / 795mm
Depth 6¼" / 160mm

INSTALLATION CLEARANCES

Rear 5¾" / 145mm including Rear Standoffs
LH Side 0" / 0mm
RH Side 1" / 25mm

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is required

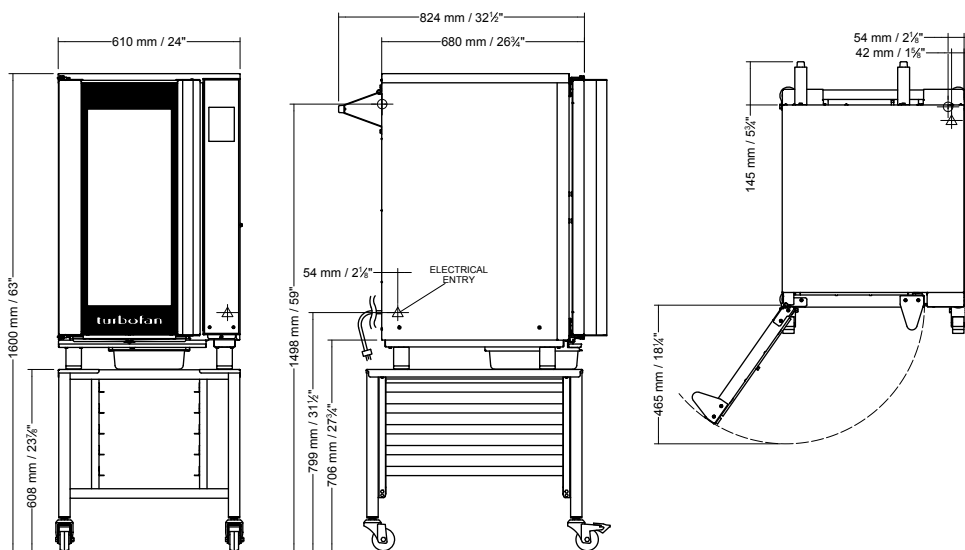

moffatusa.com
turbofanoven.com

USA

Moffat Inc
3760 Industrial Avenue
Suite B
Winston-Salem
North Carolina 27105
Ph Toll Free 1-800-551 8795
Ph 336-661 0257
Fax 336-661 9546
Email sales@moffat.com



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
1688 US.TFN.S.21.01

