

EXS Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 47kg

EXS 107 AS OX Small square gourmet cube 25g, Ø30mm x 30mm



Small square gourmet cube
25g, 30mm dia x H 30mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 47kg daily production rate
- 18kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- XSafe - Natural Sanitation System
- EcoX - Hydrocarbon R290 refrigerant gas
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Stainless steel finishing
- Front access condenser air filter, removable and washable
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes removable air filter, ice scoop, water and drain hose
- Optional adjustable feet available up to 850mm high

EXS Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 47kg

EXS 107 AS OX

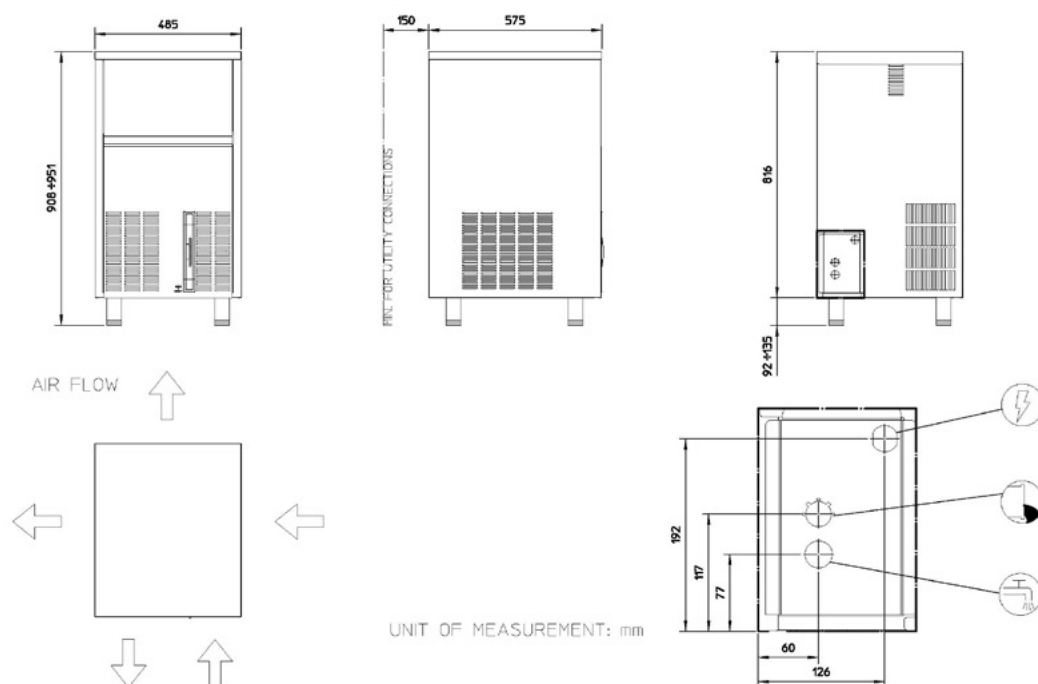

moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
50	47	40

Dimensions

Width:	485mm
Depth:	575mm
Height:	908mm (including legs)
Nett weight:	48kg
Packed weight:	59kg

Water consumption

Air cooled version: 4.7 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 460W,
10A cordset supplied

No. Circuit wire: 3
Compressor: 900W
Energy consumption: 8.6kW/24hr*

* Based on 32°C ambient / 21°C water temperature conditions

Refrigerant type

R290

Installation distance from wall

Rear	150mm
Sides	150mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection:	R ¾"
Cold water:	5-38°C
Pressure:	100-500kPa
Water outlet connection:	Ø¾"

Operating requirements

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2609