

## EXS Series Self Contained Machines – with Progressive Water Discharge – up to 40kg

**EXS 87 AS OX** Small square gourmet cube 25g, Ø30mm x 30mm



Small square gourmet cube  
25g, 30mm dia x H 30mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 40kg daily production rate
- 17kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- XSafe - Natural Sanitation System
- EcoX - Hydrocarbon R290 refrigerant gas
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Stainless steel finishing
- Front access condenser air filter, removable and washable
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes removable air filter, ice scoop, water and drain hose
- Optional adjustable feet available

## EXS Series Self Contained Machines – with Progressive Water Discharge – up to 40kg

### EXS 87 AS OX

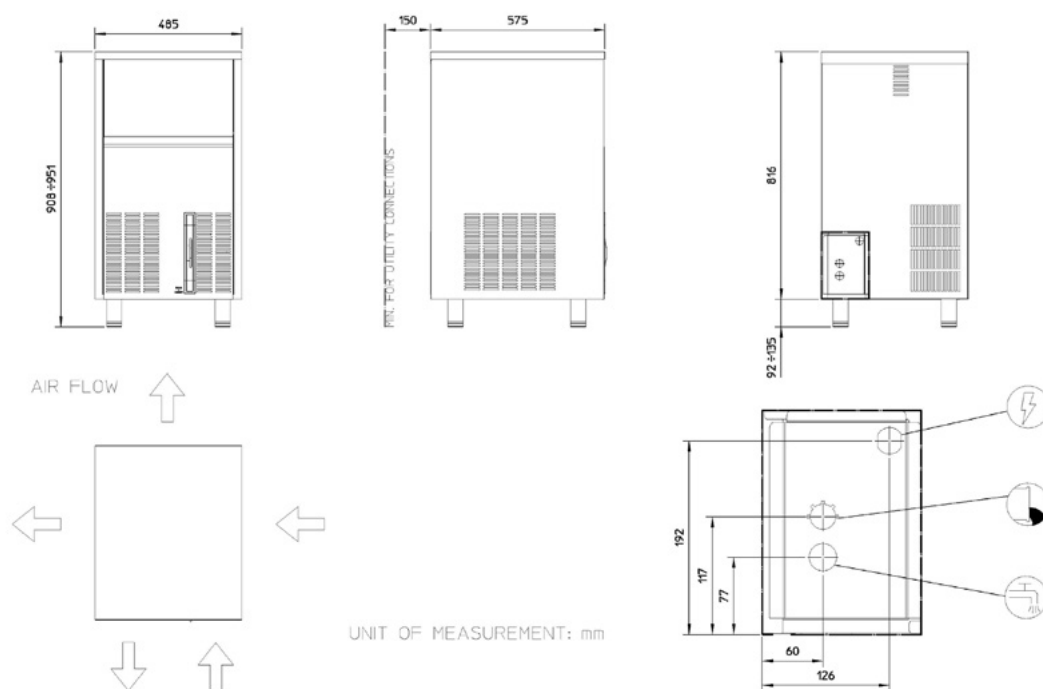

moffat.com.au

Australia  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production per 24 hours

Ambient temperature / Water temperature

| 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|-------------|-------------|-------------|
| 44          | 40          | 25          |

#### Dimensions

|                |                        |
|----------------|------------------------|
| Width:         | 485mm                  |
| Depth:         | 575mm                  |
| Height:        | 908mm (including legs) |
| Nett weight:   | 41kg                   |
| Packed weight: | 55kg                   |

#### Water consumption

Air cooled version: 2.8 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 475W,  
10A cordset supplied  
No. Circuit wire: 3  
Compressor: 900W  
Energy consumption: 8.8kW/24hr\*

\* Based on 32°C ambient / 21°C water temperature conditions

#### Refrigerant type

R290

#### Installation distance from wall

|       |       |
|-------|-------|
| Rear  | 150mm |
| Sides | 150mm |

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R ¾"  
Cold water: 5-38°C  
Pressure: 100-500kPa  
Water outlet connection: Ø¾"

#### Operating requirements

|                   | Minimum                | Maximum                |
|-------------------|------------------------|------------------------|
| Air temperature   | 10                     | 43                     |
| Water temperature | 5                      | 38                     |
| Water pressure    | 1 bar / 14psi / 100kPa | 5 bar / 70psi / 500kPa |

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.2609