
SDX CONVECTION HEATED THERMOBOX

F210R-BCB 14 x 1/1 GN



-
- 14 x 1/1 GN capacity
 - 80mm tray spacing
 - 30kg maximum load per pair of guides
 - Convection heated thermobox with electronic temperature control
 - Polyurethane insulation class IP55 rated
 - ABS plastic exterior wall construction
 - Welded container frame in stainless steel
 - Stainless steel pressed guides from inner container
 - Single action central break
 - 160mm wheels, two break swivel castors and two fixed
 - Impact protection bumper of stainless steel coated with PVC

SDX CONVECTION HEATED THERMOBOX F210R-BCB 14 x 1/1 GN



Dimensions

Width: 525mm
 Depth: 770mm
 Height: 1515mm
 Nett weight: 64kg
 Packed weight: 77kg

Electrical rating

230V, 1P+N+E, 50Hz, 4.35A
 Energy consumption: 1000W



Australia

www.moffat.com.au

New Zealand

www.moffat.co.nz

Inner dimensions

14 x 1/1 GN capacity

Width: 330mm
 Depth: 540mm
 Height: 1160mm

Australia

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +61 3-9518 3888

Facsimile +61 3-9518 3833

vsales@moffat.com.au

New South Wales

Telephone +61 2-8833 4111

nswsales@moffat.com.au

South Australia

Telephone +61 7-3630 8600

vsales@moffat.com.au

Queensland

Telephone +61 7-3630 8600

qldsales@moffat.com.au

Western Australia

Telephone +61 8-9413 2400

wasales@moffat.com.au

New Zealand

Moffat Limited

Christchurch

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600


Facsimile +64 3-983 6660

sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150

sales@moffat.co.nz

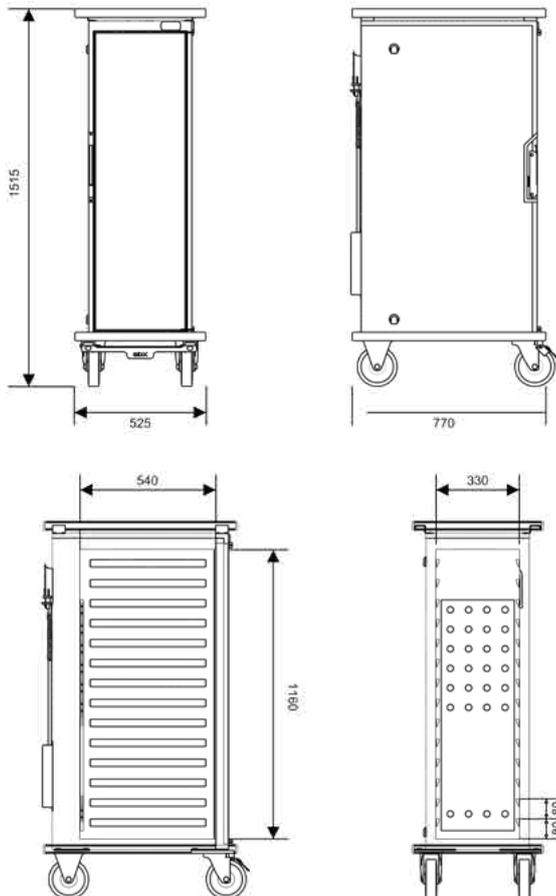

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
 AN.SDX.01/26