

## MX65cAT7R-C Roll-in Blast Chiller only

### Standard Features

- Roll-in unit suitable for direct transfer of Convotherm 20 tray combi trolley racks (trolley not included) - other combi model trolley rack configurations available upon request
- Free standing unit on legs
- 7" ergonomic touch screen with large keys for ease of use
- User friendly operation with easy to use functions:
  - Hard or soft chill mode
  - Easy switch to probe or timer mode
  - Self Adaptive intelligent chilling mode
- Eco-friendly R455A refrigerant gas model
- Refrigerant evaporator with double air flow
- Auxiliary functions: ice cream hardening, ventilated drying, multiple timers, customisable multiple phases, raw fish sanitation multiple timers, customisable multiple phases, raw fish sanitation
- 40 program cycles with favourites key – shortcuts to last 9 programs used
- Supplied with expansion and solenoid valves
- Pre-chilling cycle key to maximise efficiency
- Automatic hold mode after each cycle
- Manual defrosting with automatic control of time
- 3 point core temperature probe
- Timer mode or continuous run
- Left door hinged only
- Integrated door latch to aerate cabinet when not in use
- Automatic fan stop when opening the door
- USB HACCP Recorder
- External and internal finish made of 304 stainless steel
- Heated door frame to reduce condensation
- Injected polyurethane foam insulation - 60mm thick

Please refer to Moffat price list for options and accessories

### Technical data

Trolley Capacity	1 x 20 1/1GN Combi trolley
External dimensions	W 850mm x D 790mm x H 2420mm
Load Capacity	85kg*
Electrical connections	1P+N+E, 230-240V, 50/60Hz, 15A, 3.3kW
Nett weight	215 kg
Waste	Provide for a water runoff with trap
Air-cooled condensing unit - Refrigerant type R455A	
Ambient temperature requirement +15°C — +32°C	

\* Note – Load capacities may vary depending on the thermal conductivity of the food being chilled, the thickness of product and container used. Trolley not included.

**Australia**  
moffat.com.au


**Moffat Pty Limited**  
740 Springvale Road  
Mulgrave  
Victoria 3170  
Australia  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
vsales@moffat.com.au

**New Zealand**  
moffat.co.nz


**Moffat Limited**  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
New Zealand  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz



### Dimensions

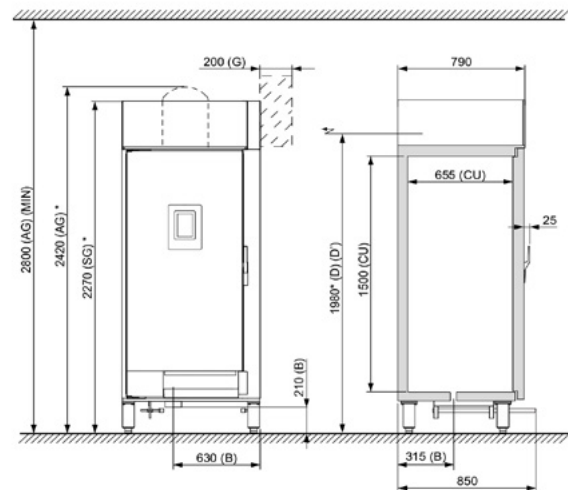

- (A) Electrical power supply
- (B) De-icing water runoff
- (SG) Without housed unit
- (D) Liquid line 1/2"
- (D') Suction line 7/8"
- (AG) With housed unit
- (G) Area to keep clear for ventilation of the condensing unit
- (CU) Useful
- (MIN) Minimum
- \* Setting -0/+30 mm

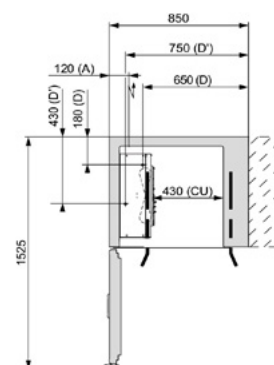

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values. In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN-FRI-S-2501



an Ali Group Company



The Spirit of Excellence