GAS

TECHNICAL DATA SHEET FOR **GP8910GE**

WALDORF

GAS GRIDDLE ELECTRIC STATIC OVEN **900mm**




GP8910GEL

Base model variants

GP8910GEL	**GP8910GEH**	Mild steel griddle plate
GP8910GELCR	**GP8910GEHCR**	Chrome griddle plate
GP8910GELR5	**GP8910GEHR5**	Mild steel griddle plate with 1/2 ribbed section
GP8910GELCR5	**GP8910GEHCR5**	Chrome griddle plate with 1/2 ribbed section

- 20mm mild steel plate
- Angled plate adds grease drainage
- Mirror chrome and 1/2 ribbed plate options
- GN 2/1 6.5 kW electric static oven
- Drop down door

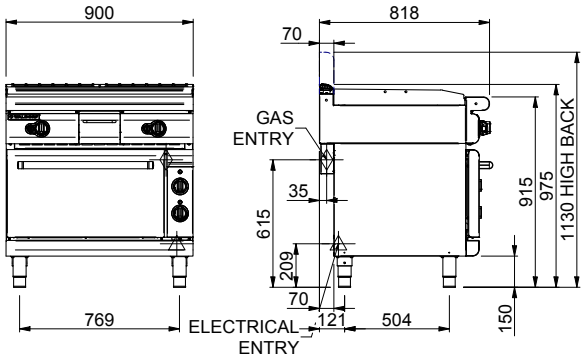





SPECIFICATIONS

Griddle

Burners 2 x 40MJ/hr /
11.5kW 3 bar burners

Oven

4.5kW bottom heating element
2.0kW top heating element

Power (by model)		**GP8910GE**	**GP8910GECR**	**GP8910GER5**	**GP8910ECR5**
Gas power	**AU / NZ** **UK-INT**	80 MJ/hr / 84MJ/hr 21 kW, 71,650Btu/hr			
Electric power		6.5kW			
Cooking surface area		892mm x 530mm, 4728cm^2			

Oven dimensions - Width 665mm Depth 590mm Height 335mm, Rack Size 655mm x 530mm, Rack positions 5

Gas connection - R ¾ (BSP) male. 130mm from RH side, 35mm from rear, and 616mm from floor. All units supplied with Natural and LP gas regulator.

Gas type - Available in Natural gas and LP gas. Please specify when ordering. Units supplied complete with gas type conversion kits.
Other gas types on request.

Electrical requirements - (1 phase connection) 6.5kW, 220-240V, 50/60Hz, 1P+N+E, 27.1A,
(3 phase connection) 6.5kW, 400-415V, 50/60Hz, 3P+N+E, L1 - 8.3A, L2 - 9.4A, L3 - 9.4A

Electrical connection - 77mm from RH side and 209mm from floor

Dimensions	**GP8910GE**
Width	900mm
Depth	818mm
Height	915mm 975mm (Low back) 1130mm (High back)
Weight	230kg

Packed data	**GP8910GE**
Volume	1.089m^3
Packed weight	255kg
Width	960mm
Depth	900mm
Height	1260mm

Options -

Rear rollers
Castors
Splashguard
Plinth mounting
Kick panels
Joining caps
High back kit

AGA 6898 G

CE 2797 CE681450 UK CA

© Copyright Moffat Ltd
Waldorf.01.2026

ISO9001 Quality Management Standard

GAS

TECHNICAL DATA SHEET FOR **GP8910GE**

WALDORF

GAS GRIDDLE ELECTRIC STATIC OVEN **900mm**

GENERAL CONSTRUCTION

- Modular hygienic edge joining system
- Stainless steel construction
- Bull nose 2.0mm 304 stainless steel
- Front panels 304 stainless steel
- Front panels vitreous enamelled - Bold
- Control panel vitreous enamelled - Cue
- Low Back and High Back stainless steel with vitreous enamelled cast iron caps
- Stainless steel grease drawer for easy cleaning and handling

CONTROLS

- Ergonomic control knobs with panel bezel for easy view control setting
- 90-300°C thermostatic controls
- Pilot and flame failure protection
- Piezo ignition to each pilot burner
- Oven - 60-300°C thermostatic control and separate top heat Hi-Lo regulator
- Power and heating Indictors
- Over-temperature safety cut-out

Griddle

- 2 independent cooking zones
- 2 x 3 bar chrome steel burners
- 20mm thick mild steel plate, fully seam welded
- Plate angled at front to aid drainage
- Grease trough and drain hole
- Large capacity grease drawer
- 1/2 (450mm) ribbed plate option
- Mirror chrome plate option
- 1/2 (450mm) ribbed mirror chrome plate option

Oven

- 6.5kW elements with 4.5kW bottom heat and 2.0kW top heat
- 2.0mm galvanised steel full chassis
- Vitreous enamelled fully welded GN 2/1 oven
- Heavy-duty cast iron even heat sole plates
- Drop down door with welded internal frame and pressed vitreous enamelled door inner
- Stainless steel braided oven door gasket
- Heavy-duty chromed wire 4 position side racks
- 2 heavy-duty chromed wire oven racks
- Stainless steel legs - adjustable 135-175mm

CLEANING AND SERVICING

- Easy clean stainless steel external finish
- Access to all serviceable parts from front of unit
- Easy clean vitreous enamelled oven and door inner
- Oven side racks and sole plates lift out for cleaning

INSTALLATION INCLUSIONS

- 70mm full width rear connection rebate
- Modular Joining Kit
- Attachment points for Bench Ends


ITEM CODES

900mm Gas Griddle Range Electric Static Oven


Gas range electric static models supplied as Item Code **GE**




LOW BACK HIGH BACK




Mild steel plate



Chrome plate



Mild steel plate w/ 1/2 ribbed



Chrome plate w/ 1/2 ribbed

Standard				
Low Back	GP8910GEL	GP8910GELCR	GP8910GELR5-C	GP8910GELCR5
High Back	GP8910GEH	GP8910GEHCR	GP8910GEHR5-C	GP8910GEHCR5
CUE				
-C0 Cue vitreous enamel control panel colour finish *(see Cue colour code options)*				
Low Back	GP8910GEL-C0	GP8910GELCR-C0	GP8910GELR5-C0	GP8910GELCR5-C0
High Back	GP8910GEH-C0	GP8910GEHCR-C0	GP8910GEHR5-C0	GP8910GEHCR5-C0
BOLD				
-B0 Bold vitreous enamel full front colour finish *(see Bold colour code options)*				
Low Back	GP8910GEL-B0	GP8910GELCR-B0	GP8910GELR5-B0	GP8910GELCR5-B0
High Back	GP8910GEH-B0	GP8910GEHCR-B0	GP8910GEHR5-B0	GP8910GELCR5-B0

Standard Models Gas Type: Natural Gas add suffix **-N**, LP Gas Propane add suffix **-L**, Butane add suffix **-B**
CUE/BOLD Models Gas Type: Natural Gas add suffix **N**, LP Gas Propane add suffix **L**, Butane add suffix **B**

STANDARD COLOUR OPTIONS

BLACK
Cue -C0
Bold -B0

CHILLI RED
Cue -C2
Bold -B2

BURGUNDY
Cue -C3
Bold -B3

Designed and manufactured by

MOFFAT

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
Waldorf.01.2026

ISO9001 Quality Management Standard