

# M2C

PASSTHROUGH DISHWASHER  
C/W HEAT RECOVERY UNIT

# WASHTECH®



## STANDARD FEATURES

- Integrated Heat Recovery Unit
- No external extraction canopy required\*
- Recycles energy from steam to heat incoming water
- Compatible with 595mm to 640mm benchgaps
- 60, 120 and 180 second cycles - up to 1080 plates per hour
- Touchscreen controls with versatile Heads Up Display
- 1.0HP soft start wash pump
- Dual chemical pumps
- Assured rinse with dual boilers plus rinse pump
- Hands-free drainage system with sump and drain pump
- Two-stage stainless steel wash and drain filtration
- Heavy-duty stainless-steel construction and manifold
- Independent stainless-steel arms

- 1x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)
- 1x plumbing connection kit (water and chemical hoses)

## SPECIFICATIONS

### D - Cold Water

Temperature	<25°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

### B - Drainage


Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400-415	50	15	11.25**

\*Subject to adequate general ventilation. Full details and certification from SEED available on request.

\*\*Single phase options possible although requires modification by a Technician and will increase recovery time between cycles. Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

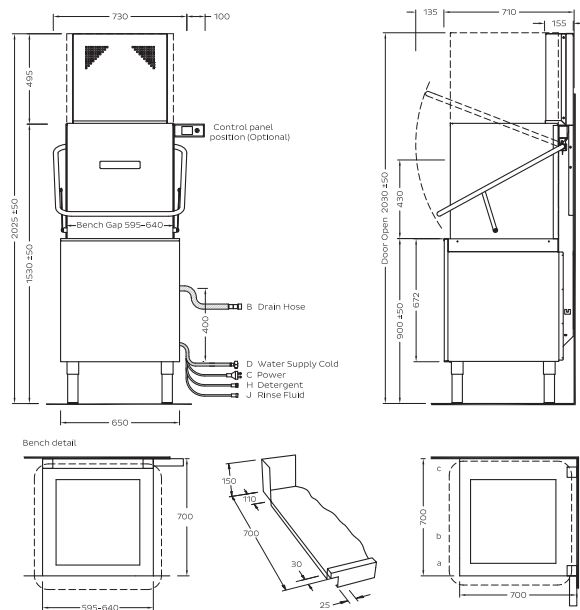

### Dimensions

	Machine	Packed
Width (mm)	730	760
Depth (mm)	710	820
Height (mm)	2025	2015
Weight (kg)	118	142
Volume (m3)		1.10

### Water Quality

	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

### Corner Installation Notes:

- Machine should be installed so racks are pushed into the back of the machine.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

### Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited  
© Copyright Washtech Limited / Washtech M2C Series-5 / WM2C0040 / Feb-25

an Ali Group Company



the spirit of excellence