



TECHNICAL SPECIFICATION SHEET FOR

Icematic Modular Ice Flaker MF205




- Modular high capacity ice flaker head only
- **190kg** daily production rate
- **6.5 litres** per hour water consumption
- Air cooled condensing unit
- R290 propane refrigerant gas
- Electronic control panel with LED showing proper functioning or warning indicators
- Optical ice level control with yellow LED light indicator when full
- Stainless steel external body
- Requires storage bin model SB105, SB155, SB205*, SB255*, SB305*, SB405*, SB500, SB700, SB140
- Moffat TA13-NZ filter kit, including head and fittings

* Cover kits required to suit with storage bins as follow: KF205-255 for SB205, SB255; KF 305 for SB305; KFM 405 for SB405

Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.



TECHNICAL SPECIFICATION SHEET FOR Icematic Modular Ice Flaker MF205

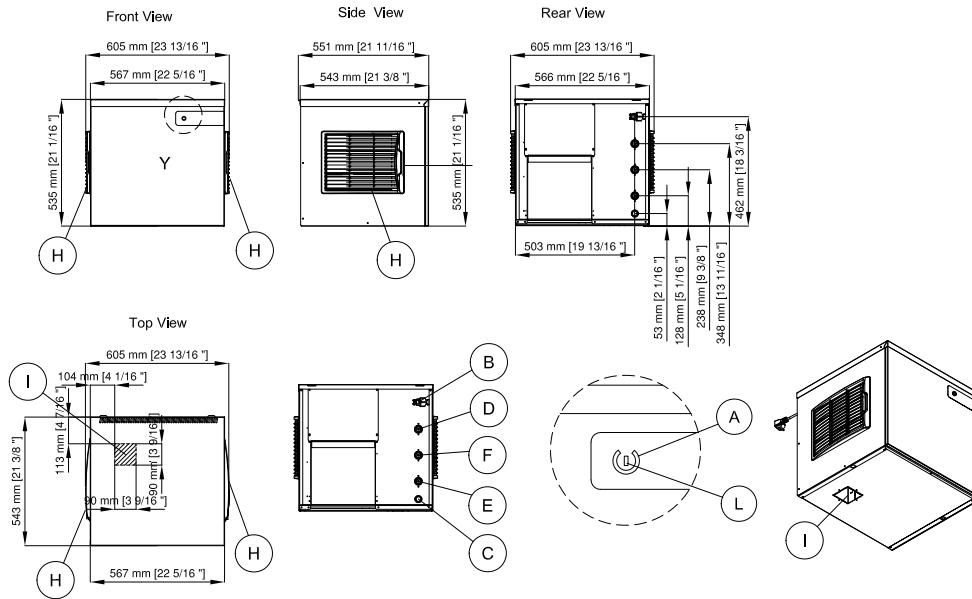

- A** Switch Touch START-STANDBY
- B** Electrical cable supply
- C** Water outlet connection Ø 20 mm
- D** Water outlet connection water condensation Ø 20 mm
- E** Water inlet connection - 3/4" gas
- F** Water inlet connection water condensation 3/4"
- H** Air Filter
- I** Ice drop area
- L** Led white-red regulation humidity ice and set T° storage probe

Ice production per 24 hours

		Water temperature				
		32°	21°	15°	10°	
Ambient temperature	10°	180	194	198	210	kg
	21°	160	174	181	120	kg
	32°	140	155	162	169	kg
	38°	133	147	154	160	kg

MF205

Dimensions

Width: 570mm
Height: 545mm
Depth: 535mm
Nett weight: 57kg
Packed weight: 64kg

Water consumption

Air cooled condensing unit: 4 litres per hour

Electrical rating

220-240V, 1P+N+E, 50Hz
Compressor power rating 878W
Total absorbed power 720W,
10A cordset fitted

Refrigerant type

R290

Installation distance from wall

- rear 150mm
- right 150mm
- left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

Water connection requirements

Inlet connection: R 3/4"
Cold water (5-35°C)
Pressure (1-5 bar)
Water outlet connection: Ø 20mm



moffat.co.nz

New Zealand
Moffat Limited
Christchurch
45 Illinois Drive
Rolleston
Christchurch 7675
Telephone 03-983 6600
Facsimile 03-983 6660
sales@moffat.co.nz

Auckland
Telephone 09-574 3150
sales@moffat.co.nz

Disclaimer:
All unit capacities are based on subjective testing. Moffat accepts no liability for production values.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
NZ.ICES.2301

