



MXF Series Modular Flake Ice Machines — up to 430kg MXF 1027 AS OX Superflake ice



Superflake ice



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 430kg daily production rate
- Head only ice maker: requires a separate storage bin to store the ice produced
- Very dry flake ice 12% of water contents
- Hydrocarbon R290 refrigerant gas
- Air cooled version
- XSafe Natural Sanitation System
- Core ice system stable evaporator system (Axial load)
- Highly balanced augur double fly system core evaporator
- · Improved evaporator stability and noise free
- High tech water sump with easy regulation system
- Ice level sensor for seamless operations
- Smart touch display
- · Bluetooth and cloud connectivity

- XWave app with improved electronics and programming
- 304 stainless steel finish with removable air grid

Recommended Storage Bins

- NB 193 129kg storage capacity
- NB 393 with CBT 30 52 AMCD cover 181kg storage capacity
- NB 530 with CBT 30 52 AMCD cover 243kg storage capacity












MXF Series Modular Flake Ice Machines — up to 430kg

MXF 1027 AS OX

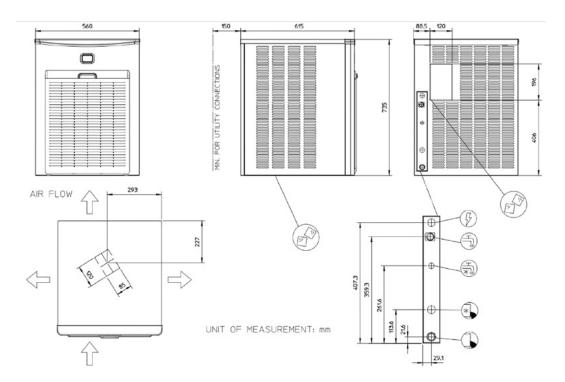



moffat.com.au

Australia Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au

New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone 08-9413 2400 wasales@moffat.com.au

Ice production kg per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
501	430	314

Dimensions

560mm Width: 615mm Depth: 735mm Height: Nett weight: 80kg Packed weight: 90kg

Water consumption

Air cooled version: 13 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1570W,

10A cordset supplied

No. Circuit wire: 3 Compressor: 3300W* Energy consumption: 35kW/24hr*

* Based on 32°C ambient / 21°C water temperature conditions

Refrigerant type

R290

Installation distance from wall 100mm Rear

Side 150mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R ¾" 5-38°C Cold water: Pressure: 100-500kPa Water outlet connection: Ø ¾"

Operating requirements

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals



© Copyright Moffat Ltd

an Ali Group Company

