

MXG Series Modular Gourmet Ice Maker – up to 275kg

MXG M 637 AS OX Medium gourmet cube 20g, Ø30mm x 34mm



Medium gourmet cube
20g, 30mm dia x H 34mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 275kg daily production rate
- Head only ice maker - requires a separate storage bin to store the ice produced
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- XSafe - Natural Sanitation System
- EcoX - Hydrocarbon R290 refrigerant gas
- Horizontal evaporator spray-system technology
- Simple, reliable electronic controls
- Clean alert indicator to clean filter
- Resistant stainless steel exterior
- Simple, reliable electromechanic controls
- Easy access front condenser air filter
- External indicator lights to show operation status
- Includes removable air filter, water & drain hose

Recommended storage bins

- NB 393 – 178kg storage capacity
- NB 530 – 243kg storage capacity
- NB 948 – 406kg storage capacity

MXG Series Modular Gourmet Ice Maker – up to 275kg

MXG M 637 AS OX

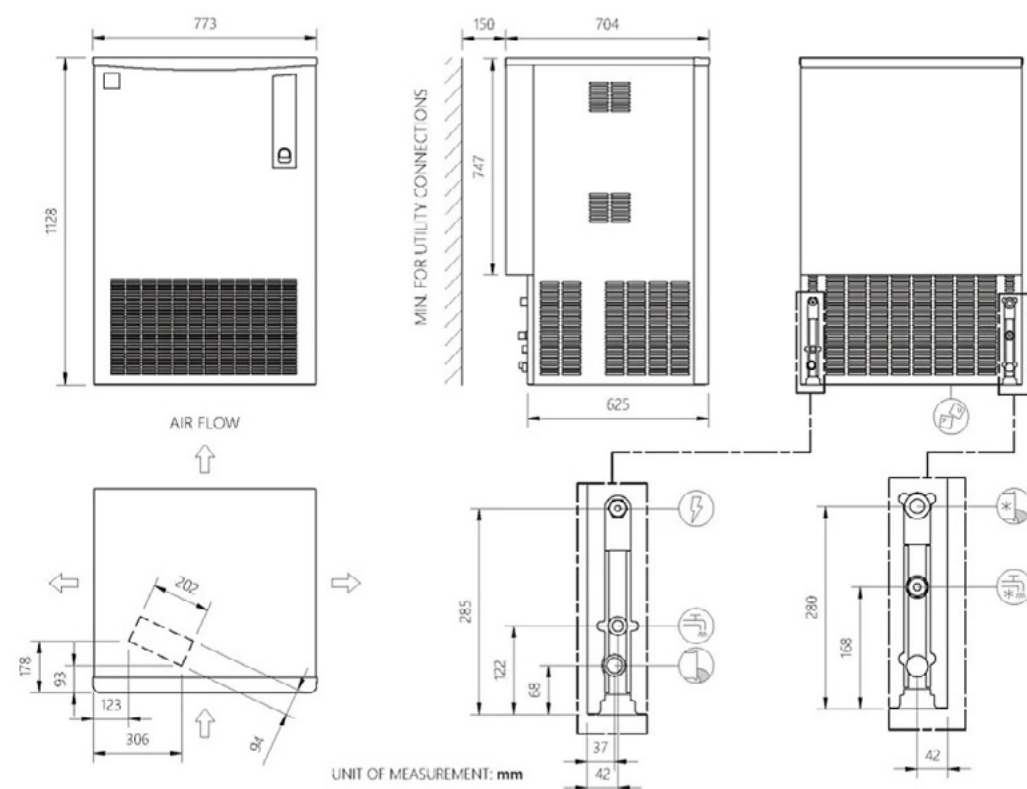

MOFFAT
moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
300	275	215

Dimensions

Width:	773mm
Depth:	704mm
Height:	1128mm
Nett weight:	117kg
Packed weight:	129kg

Water consumption

Air cooled version: 25 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 2500W,
10A cordset supplied
No. Circuit wire: 3
Compressor: 5000W
Energy consumption: 45kW/24hr*

* Based on 32°C ambient / 21°C water temperature conditions

Refrigerant type

R290

Installation distance from wall

Rear	100mm
Sides	150mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection:	R ¾"
Cold water:	5-38°C
Pressure:	100-500kPa
Water outlet connection:	Ø¾"

Operating requirements

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2609