




# CulinoPro Electric Combi Jacketed Kettle CulinoPro Combi 150E (CUL-C150E)


# Standard Features

- · Electric heated combi kettle with integrated mixer
- Elevated control pillar with guiding 7" touch panel
- Stepless mixing speed 10-140rpm/min, auto reverse
- 9 preset mixing patterns
- Functional timer with audiovisual alerts
- Electric tilting with auto tilt-back 40L-150L models
- Tilting height 600mm
- Safety grid lid
- User privilege levels
- Strainer plate & Safety grid lid included
- · Automatic measured food water filling
- S2 handshower as standard
- USB HACCP data collection port and control panel updates
- Diagnostics for maintenance
- · Unit shown includes free-standing floor kit
  - other options available

Please refer to Moffat price list for options and accessories





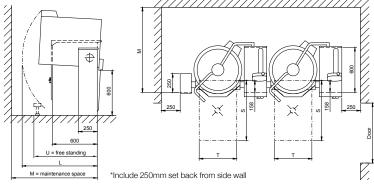

# Technical Data

1110mm

600mm

Net Volume Electrical Power 27.6 kW Spare Volume 19 L Voltage 400-415V, Gross Volume 169 L 3P+N+E 50/60Hz AMP 50A Dimensions Width 1360mm Total Heat 24kW Height 1500mm

Latent 1.0 kW, Load Sensible 4.3 kW Waste By kitchen

contractor Cold ø15mm 305 kg Nett Weight Hot ø15mm\*

150E								
Model	mm							
Model	L1	Н	L	М	U	S	Т	Door

# Australia moffat.com.au

Moffat Pty Limited 740 Springvale Road

Mulgrave Victoria 3170

Australia Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

New Zealand moffat.co.nz

#### Moffat Limited

45 Illinois Drive Izone Business Hub Rolleston 7675 New Zealand Telephone +64 3-983 6600 Facsimile +64 3-983 6660

sales@moffat.co.nz



Depth

Water

Tilting height

Connections

\*\* for handshower if required

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values. In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN-MET-S-2501



an Ali Group Company

