




# CulinoPro Electric Combi Jacketed Kettle CulinoPro Combi 200E (CUL-C200E)


#### Standard Features

- · Electric heated combi kettle with integrated mixer
- Elevated control pillar with guiding 7" touch panel
- Stepless mixing speed 10-140rpm/min, auto reverse
- 9 preset mixing patterns
- Functional timer with audiovisual alert
- Hydraulic tilting with auto tilt-back 200L-400L models
- Tilting height 600mm
- · Safety grid lid
- User privilege levels
- Strainer plate & Safety grid lid included
- Automatic measured food water filling
- S2 handshower as standard
- USB HACCP data collection port and control panel updates
- Diagnostics for maintenance
- · Unit shown includes free-standing floor kit
  - other options available

Please refer to Moffat price list for options and accessories





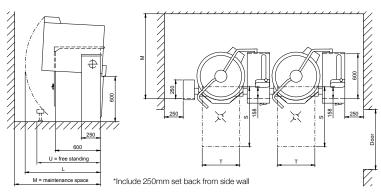

## Technical Data

Net Volume 200 L Electrical Power 35.6 kW Spare Volume 19 L Voltage 400-415V, Gross Volume 219 L 3P+N+E 50/60Hz AMP 63A Dimensions Width 1360mm Total Heat 34kW Height 1500mm

Latent 1.4 kW, Load 1110mm Depth Sensible 6.1 kW Tilting height 600mm By kitchen Waste Connections

contractor Water Cold ø15mm 345 kg Nett Weight Hot ø15mm\*\*

## Australia moffat.com.au

Moffat Pty Limited

740 Springvale Road Mulgrave Victoria 3170 Australia

Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

New Zealand moffat.co.nz

#### Moffat Limited

45 Illinois Drive Izone Business Hub Rolleston 7675 New Zealand Telephone +64 3-983 6600

Facsimile +64 3-983 6660 sales@moffat.co.nz



\*\* for handshower if required

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values. In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN-MET-S-2501



an Ali Group Company



Door S Т 11 Н ı M U Model mm mm mm mm mm mm mm mm 200E 910 1945 1155 1285 1110 800 600 1000