




CulinoPro Electric Combi Jacketed Kettle CulinoPro Combi 60E (CUL-C60E)


Standard Features

- · Electric heated combi kettle with integrated mixer
- Elevated control pillar with guiding 7" touch panel
- Stepless mixing speed 10-140 rpm/min, auto reverse
- 9 preset mixing patterns
- Functional timer with audiovisual alerts
- Electric tilting with auto tilt-back 40L-150L models
- Tilting height 600mm
- · Safety grid lid
- User privilege levels
- Strainer plate & Safety grid lid included
- Automatic measured food water filling
- S2 handshower as standard
- USB HACCP data collection port and control panel updates
- Unit shown includes free-standing floor kit - other options available

Please refer to Moffat price list for options and accessories



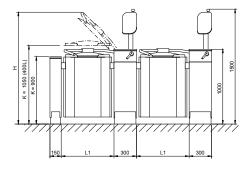

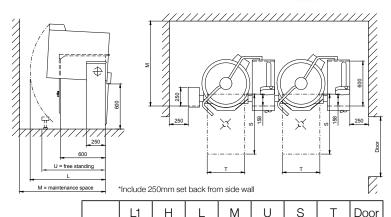

mm

955

mm

1180

Technical Data

Net Volume 60 L Electrical Power 18kW Spare Volume 8 L Voltage 400-415V, Gross Volume 68 L 3P+N+E 50/60Hz AMP 32A Dimensions Width 1044mm Total Heat 16kW

Height 1500mm Latent 0.6 kW, Load 860mm Depth Sensible 2.6 kW Tilting Height 600mm Waste By kitchen Connections contractor

Nett Weight

Hot ø15mm* ** for handshower if required

Cold ø15mm

Australia moffat.com.au

mm

594

mm

1740

Model

60E

Moffat Pty Limited 740 Springvale Road Mulgrave Victoria 3170

Australia Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

New Zealand moffat.co.nz

mm

860

mm

800

mm

400

mm

800

Moffat Limited

45 Illinois Drive Izone Business Hub Rolleston 7675 New Zealand Telephone +64 3-983 6600 Facsimile +64 3-983 6660

© Copyright Moffat Ltd AN-MET-S-2501

sales@moffat.co.nz



Water

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values. In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

210 kg

