




CulinoPro Electric Combi Jacketed Kettle CulinoPro Combi 80E (CUL-C80E)


Standard Features

- · Electric heated combi kettle with integrated mixer
- Elevated control pillar with guiding 7" touch panel
- Stepless mixing speed 10-140 rpm/min, auto reverse
- 9 preset mixing patterns
- Functional timer with audiovisual alerts
- Electric tilting with auto tilt-back 40L-150L models
- Tilting height 600mm
- Safety grid lid
- User privilege levels
- Strainer plate & Safety grid lid included
- Automatic measured food water filling
- S2 handshower as standard
- USB HACCP data collection port and control panel updates
- Unit shown includes free-standing floor kit - other options available

Please refer to Moffat price list for options and accessories





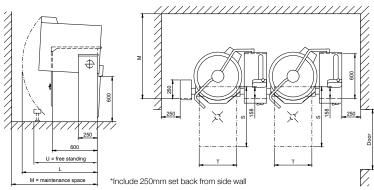

Technical Data

Net Volume 80 L Electrical Power 22kW Spare Volume 11 L Voltage 400-415V, Gross Volume 91 L 3P+N+E 50/60Hz AMP 40A Dimensions Width 1154mm Total Heat 20kW Height

1500mm Latent 0.8 kW, Load 890mm Depth Sensible 3.4 kW Tilting Height 600mm Waste By kitchen

Connections contractor Water Cold ø15mm 230 kg Nett Weight Hot ø15mm**

Australia moffat.com.au

Moffat Pty Limited

740 Springvale Road Mulgrave Victoria 3170 Australia

Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

New Zealand moffat.co.nz

Moffat Limited

45 Illinois Drive Izone Business Hub Rolleston 7675 New Zealand Telephone +64 3-983 6600

Facsimile +64 3-983 6660 sales@moffat.co.nz



** for handshower if required

Disclaimer: All unit capacities are based on subjective testing. Moffat accepts no liability for production values. In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN-MET-S-2501



an Ali Group Company



Door U S Т 11 Н M Model mm mm mm mm mm mm mm mm 80E 704 1745 1010 1235 890 800 500 800