

NU Series Self Contained Dice Ice Machines – up to 75kg

NU 157 AS OX Dice cube 10g, 22mm x 22mm x 22mm

NUH 157 AS OX Half dice cube 6g, 10mm x 22mm x 28mm

NUL 157 AS OX Large dice cube 15g, 28mm x 22mm x 28mm



Dice cube 10 g
W 22 x D 22 x H 22 mm



Half dice cube 6 g
W 10 x D 22 x H 28 mm



Large dice cube 15 g
W 28 x D 22 x H 28 mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 75kg daily production rate
- 20kg storage bin capacity
- Air cooled version
- XSafe - Natural Sanitation System
- EcoX - Hydrocarbon R290 refrigerant gas
- Vertical evaporator
- Ergonomic access to ice with sliding disappearing door
- One touch cleaning for time and labour saving
- Resistant stainless steel exterior
- Easy access front condenser air filter
- Routine maintenance visible alarm light on front panel
- Includes removable air filter, ice scoop, water and drain hose

NU Series Self Contained Dice Ice Machines – up to 75kg

NU 157 AS OX, NUH 157 AS OX, NUL 157 AS OX

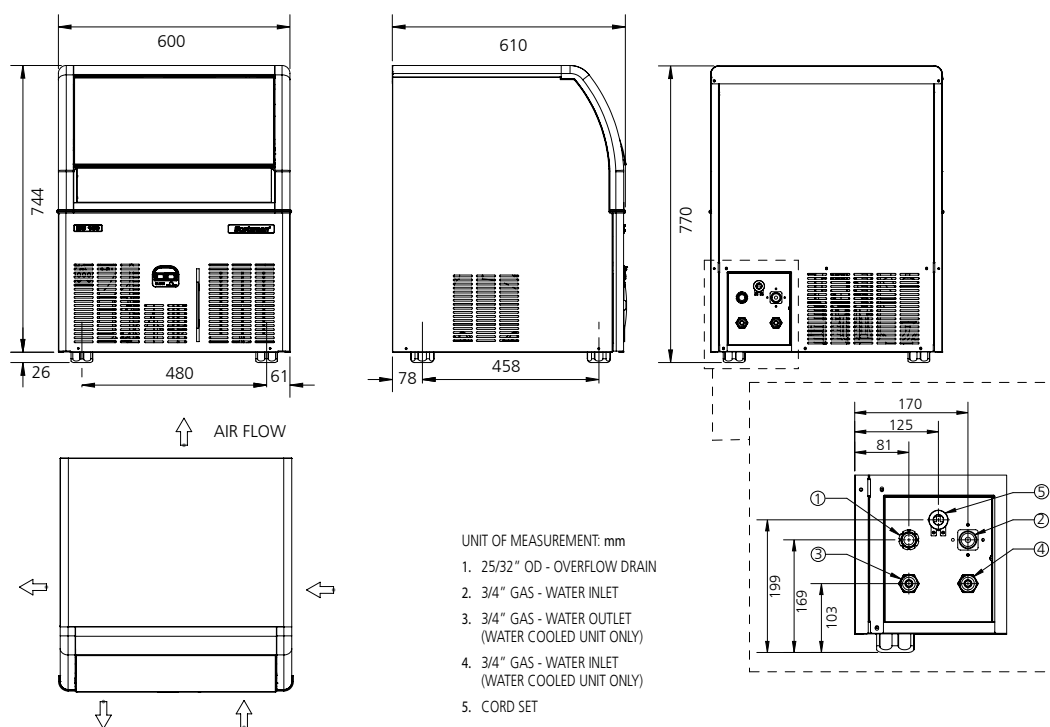

MOFFAT
moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NU 157 AS OX	85	75	55
NUH 157 AS OX	89	80	58
NUL 157 AS OX	87	78	55

Dimensions

Width: 600mm
Depth: 610mm
Height: 770mm (including feet)
Nett weight: 51kg
Packed weight: 65kg

Water consumption

Air cooled version:
NU 157 AS OX: 4.8 litres per hour
NUH 157 AS OX: 5.2 litres per hour
NUL 157 AS OX: 3.6 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 400W,
10A cordset supplied
No. Circuit wire: 3
Compressor: 587W

Energy consumption:

NU 157 AS OX: 8.9kW/24hr*
NUH 157 AS OX: 9.2kW/24hr*
NUL 157 AS OX: 9.2kW/24hr*

* Based on 32°C ambient / 21°C water temperature conditions

Refrigerant type

R290

Installation distance from wall

Rear 100mm
Sides 150mm
Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø 3/4"

Operating requirements

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

Important Notice:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2609