

## NU Series Self Contained Dice Ice Machines – up to 100kg

**NU 220 AS OX** Dice cube 10g, 22mm x 22mm x 22mm

**NUH 220 AS OX** Half dice cube 6g, 22mm x 22mm x 28mm



Dice cube 10 g  
W 22 x D 22 x H 22 mm



Half dice cube 6 g  
W 10 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 100kg daily production rate
- 37kg storage bin capacity
- Air cooled version
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- XSafe - Natural Sanitation System
- Vertical evaporator spray-system technology
- Ergonomic access to ice with sliding disappearing door
- One touch cleaning for time and labour saving
- Resistant stainless steel exterior
- Easy access front condenser air filter
- Routine maintenance visible alarm light on front panel
- Includes removable air filter, ice scoop, water and drain hose



**XSafe**

### NU Series Self Contained Dice Ice Machines – up to 100kg

#### NU 220 AS OX, NUH 220 AS OX

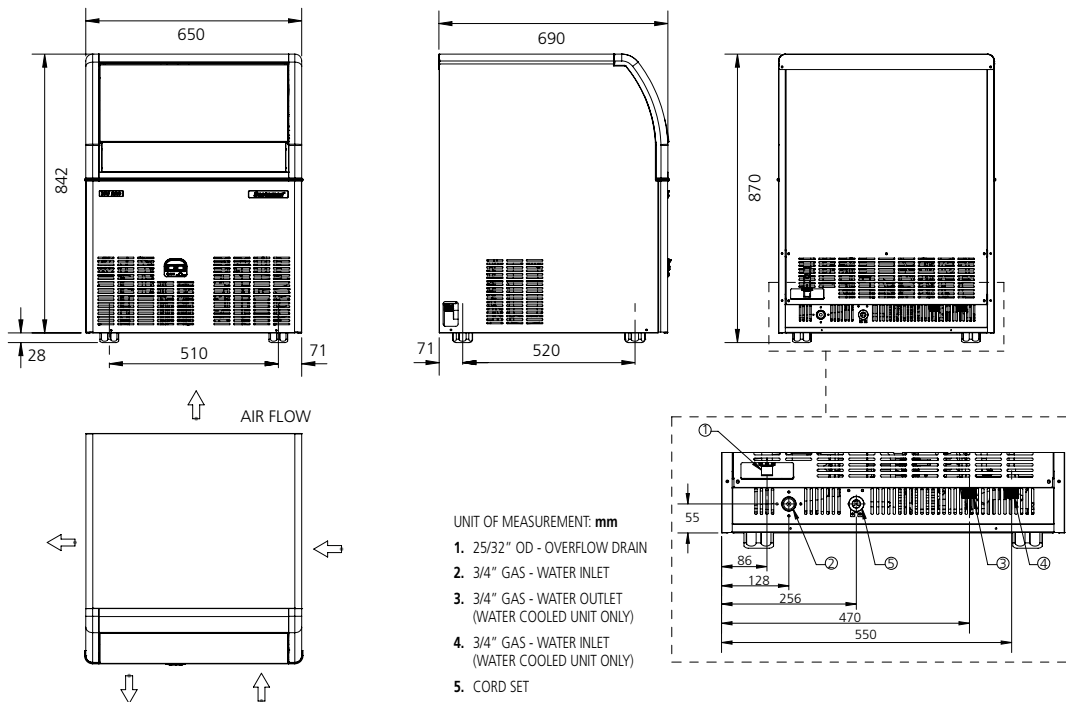

moffat.com.au

Australia  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NU 220 AS OX	109	100	70
NUH 220 AS OX	104	98	65

#### Dimensions

Width: 650mm  
Depth: 690mm  
Height: 870mm (including feet)  
Nett weight: 61kg  
Packed weight: 70kg

#### Water consumption

Air cooled version:  
NU 220 AS: 4.8 litres per hour  
NUH 220 AS: 4.5 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 600W,  
10A cordset supplied

No. Circuit wire: 3  
Compressor: 1266W  
Energy consumption: 13.9kW/24hr

#### Refrigerant type

R404a

#### Installation distance from wall

Rear 100mm  
Sides 150mm  
Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R 3/4"  
Cold water: 5-38°C  
Pressure: 100-500kPa  
Water outlet connection: Ø 3/4"

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.2201

an Ali Group Company



The Spirit of Excellence