

NXW Series Modular Dice Ice Machines – up to 437kg

NXW 1007 AS Dice cube 10g, 22mm x 22mm x 22mm

NXWH 1007 AS Half dice cube 6g, 10mm x 22mm x 28mm

NXWL 1007 AS Large dice cube 15g, 28mm x 22mm x 28mm



Dice cube 10 g
W 22 x D 22 x H 22 mm



Half dice cube 6 g
W 10 x D 22 x H 28 mm



Large dice cube 15 g
W 28 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 437kg daily production rate
- Head only ice maker - requires a separate storage bin to store the ice produced
- Air cooled version
- Vertical evaporator
- XSafe - Natural Sanitation System
- EcoX - Hydrocarbon R290 refrigerant gas
- Hinged front panel
- Tools free removal of internal parts (water sump, distribution tube, pump etc.)
- Easy internal cleaning
- Remote service support capability with X Wave app
- Delayed automatic start
- Automatic cleaning cycle
- Front evaporator access for easy servicing
- Includes air filter, water and drain hose

Recommended storage bins

- NB 530 – 243kg storage capacity
- NB 948 with CBT 48 EAMCD cover – 406kg storage capacity
- UBH 1100 – Upright storage bin with 553kg storage capacity

NXW Series Modular Dice Ice Machines – up to 437kg

NXW 1007 AS, NXWH 1007 AS, NXWL 1007 AS

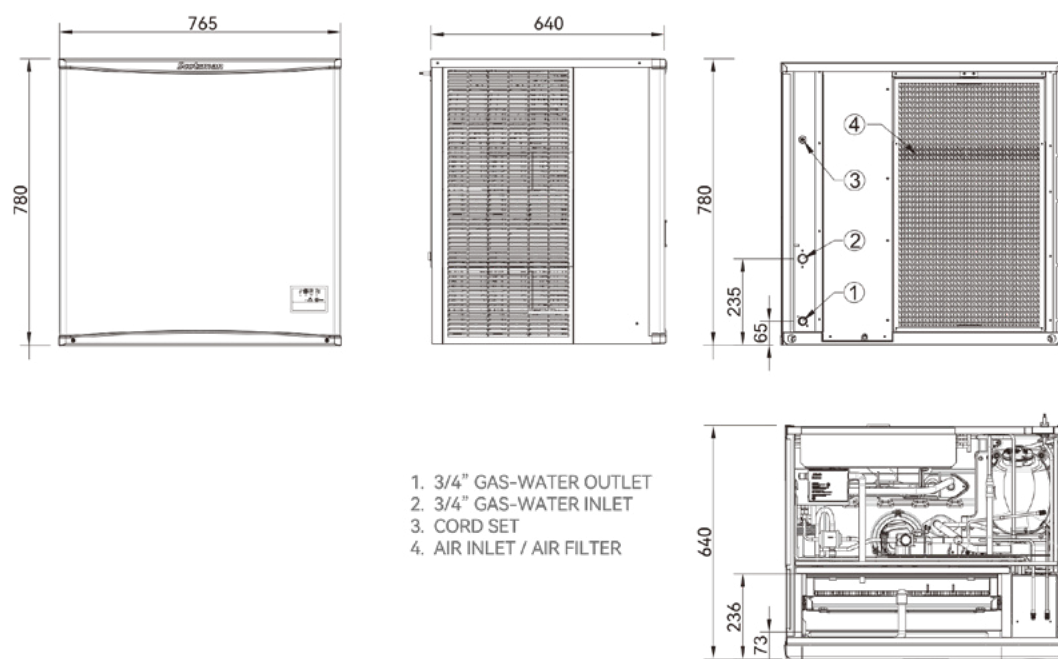

MOFFAT
moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production kg per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NXW 1007 AS OX	460	437	380
NXWH 1007 AS OX	480	470	390
NXWL 1007 AS OX	450	430	360

Dimensions

Width:	765mm
Depth:	640mm
Height:	780mm
Nett weight:	97kg
Packed weight:	113kg

Water consumption

Air cooled version:

NXW 1007 AS OX:	19.2 litres per hour
NXWH 1007 AS OX:	19.3 litres per hour
NXWL 1007 AS OX:	18.2 litres per hour

Electrical rating

Air cooled version:	230-240V, 1P+N+E, 50Hz, 1620W, 15A cordset supplied
No. Circuit wire:	3
Compressor:	4743W

Energy consumption:

NXW 1007 AS OX:	37.7kW/24hr*
NXWH 1007 AS OX:	38.7kW/24hr*
NXWL 1007 AS OX:	38.1kW/24hr*

* Based on 32°C ambient / 21°C water temperature conditions

Refrigerant type
R290

Installation distance from wall

Rear	100mm
Top	150mm
Operating requirement air temperature	10-43°C

Water connection requirements

Inlet connection:	R ¾"
Cold water:	5-38°C
Pressure:	100-500kPa
Water outlet connection:	Ø 20mm

Operating requirements

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

Important Notice:
Models and specifications are
subject to change without notice.
This spec sheet is meant for
commercial purpose only. For
technical documentation please
refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2609