

NXW Series Modular Dice Ice Machines – up to 215kg

NXW 507 AS Dice cube 10g, 22mm x 22mm x 22mm

NXWH 507 AS Half dice cube 6g, 10mm x 22mm x 28mm

NXWL 507 AS Large dice cube 15g, 28mm x 22mm x 28mm



Dice cube 10 g
W 22 x D 22 x H 22 mm



Half dice cube 6 g
W 10 x D 22 x H 28 mm



Large dice cube 15 g
W 28 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 215kg daily production rate
- Head only ice maker - requires a separate storage bin to store the ice produced
- Air cooled version
- XSafe - Natural Sanitation System
- EcoX - Hydrocarbon R290 refrigerant gas
- Vertical evaporator
- Top air discharge - suitable for narrow space installation
- Agion Technology resists the growth of microbes and T304 grade stainless steel exterior
- Hinged front panel
- Tools free removal of internal parts (water sump, distribution tube, pump etc.)
- Easy internal cleaning
- Remote service support capability with X Wave app
- Delayed automatic start


- Automatic cleaning cycle
- Front evaporator access for easy servicing
- Includes air filter, water and drain hose

Recommended storage bins

- NB 193 – 129kg storage capacity
- SB 293 with CBT 30 52 AMCD cover - 123kg storage capacity
- NB 393 with CBT 30 52 AMCD cover – 178kg storage capacity
- NB 530 with CBT 30 52 AMCD cover - 243kg storage capacity

NXW Series Modular Dice Ice Machines – up to 215kg

NXW 507 AS, NXWH 507 AS, NXWL 507 AS

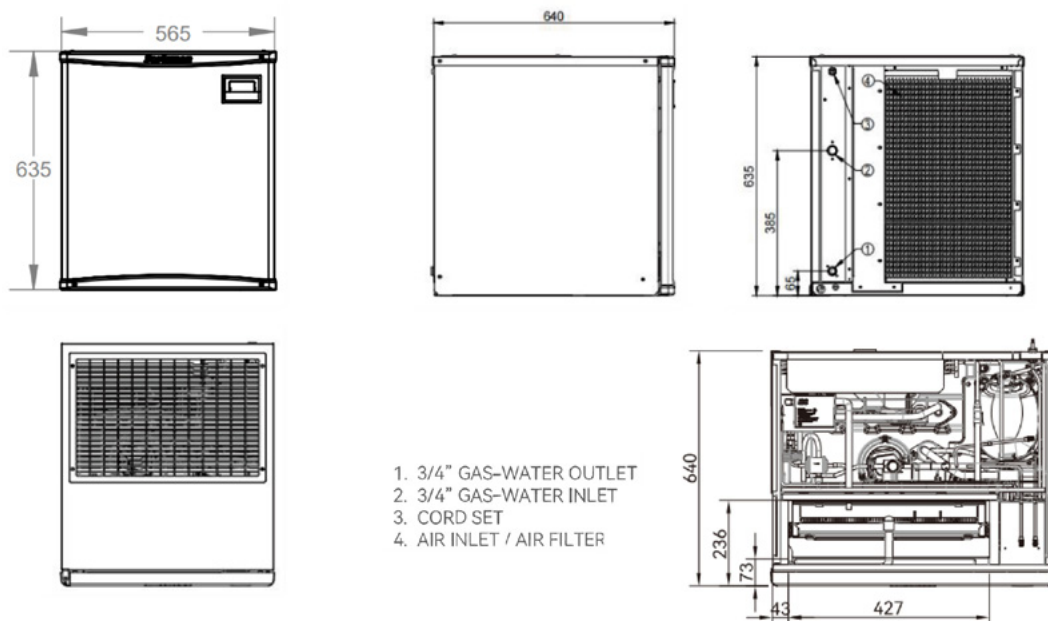

MOFFAT
moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production kg per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NXW 507 AS OX	220	215	190
NXWH 507 AS OX	220	215	195
NXWL 507 AS OX	220	215	180

Dimensions

Width: 565mm
Depth: 640mm
Height: 635mm
Nett weight: 67kg
Packed weight: 78kg

Water consumption

Air cooled version:
NXW 507 AS OX: 11.3 litres per hour
NXWH 507 AS OX: 10.7 litres per hour
NXWL 507 AS OX: 10.4 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 800W,
10A cordset supplied
No. Circuit wire: 3
Compressor: 2338W

Energy consumption:

NXW 507 AS OX: 19.3kW/24hr*
NXWH 507 AS OX: 19.3kW/24hr*
NXWL 507 AS OX: 18.8kW/24hr*

* Based on 32°C ambient / 21°C water temperature conditions

Refrigerant type

R290

Installation distance from wall

Rear 100mm
Top 400mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R ¾"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø 20mm

Operating requirements

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

Important Notice:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2609