

## NXW Series Modular Dice Ice Machines – up to 280kg

**NXW 607 AS** Dice cube 10g, 22mm x 22mm x 22mm

**NXWH 607 AS** Half dice cube 6g, 10mm x 22mm x 28mm



Dice cube 10 g  
W 22 x D 22 x H 22 mm



Half dice cube 6 g  
W 10 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 280kg daily production rate
- Head only ice maker - requires a separate storage bin to store the ice produced
- Air cooled version
- Vertical evaporator
- XSafe - Natural Sanitation System
- EcoX - Hydrocarbon R290 refrigerant gas
- Hinged front panel
- Tools free removal of internal parts (water sump, distribution tube, pump etc.)
- Easy internal cleaning
- Remote service support capability with X Wave app
- Delayed automatic start
- Automatic cleaning cycle
- Front evaporator access for easy servicing
- Includes air filter, water and drain hose
- Double stack option available

### Recommended storage bins

- NB 393 – 178kg storage capacity
- NB 530 – 243kg storage capacity

## NXW Series Modular Dice Ice Machines – up to 280kg

### NXW 607 AS, NXWH 607 AS

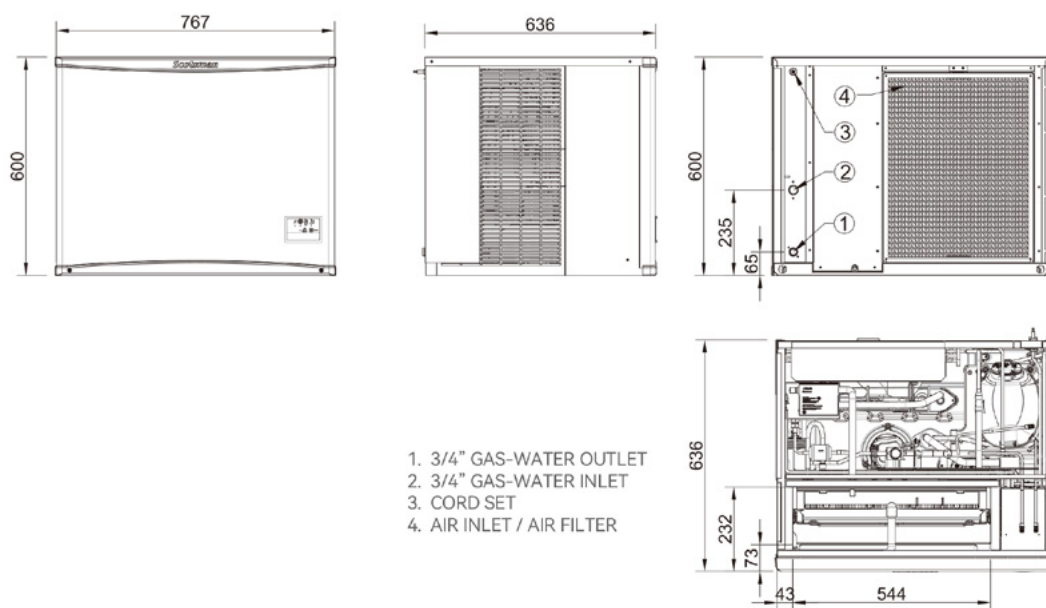

**MOFFAT**  
moffat.com.au

**Australia**  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

**New South Wales**  
Telephone 02-8833 4111  
nswsales@moffat.com.au

**South Australia**  
Telephone 03-9518 3888  
vsales@moffat.com.au

**Queensland**  
Telephone 07-3630 8600  
qldsals@moffat.com.au

**Western Australia**  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production kg per 24 hours

Ambient temperature / Water temperature

|                | 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|----------------|-------------|-------------|-------------|
| NXW 607 AS OX  | 300         | 280         | 240         |
| NXWH 607 AS OX | 300         | 280         | 230         |

#### Dimensions

|                |       |
|----------------|-------|
| Width:         | 767mm |
| Depth:         | 636mm |
| Height:        | 600mm |
| Nett weight:   | 75kg  |
| Packed weight: | 90kg  |

#### Water consumption

Air cooled version:

NXW 607 AS OX: 13.2 litres per hour

NXWH 607 AS OX: 12.7 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 990W,  
10A cordset supplied

No. Circuit wire: 3

Compressor: 2752W

#### Energy consumption:

NXW 607 AS OX: 25.4kW/hr\*

NXWH 607 AS OX: 23.3kW/hr\*

\* Based on 32°C ambient / 21°C water temperature conditions

#### Refrigerant type

R290

#### Installation distance from wall

Rear 100mm

Top 150mm

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R 3/4"

Cold water: 5-38°C

Pressure: 100-500kPa

Water outlet connection: Ø 20mm

#### Operating requirements

|                   | Minimum                | Maximum                |
|-------------------|------------------------|------------------------|
| Air temperature   | 10                     | 40                     |
| Water temperature | 5                      | 35                     |
| Water pressure    | 1 bar / 14psi / 100kPa | 5 bar / 70psi / 500kPa |

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.2609