



PK1-68, PM1-68 PK2-68W, PK3-68W, PK4-68WS Retarder Prover - Roll In

Product Features

- Suitable for racks sized 660mm x 810mm
- Accommodates trays sized 29" x 16" and 29" x 18"
- Perfect for all types of production, fresh or frozen dough
- Easy to use controls, located at eye height
- Display can be read from a distance
- Pre-programmed fermentation cycles
- Rounded angles and corners for easy cleaning

• High density insulated panels with PVC coating

- Tropicalised refrigeration units
- Internal bump bars in stainless steel
- · Fitted with interior light as standard
- Supplied in kit form requires assembly



From yeasted products to traditional sourdoughs, retarder provers are an essential element to high quality bakery applications. Manufactured in France to meet the expectation of a wide range of bakery operators, the Pani Clima range of retarder provers is designed to provide simple, consistent results from one day to the next. A simple and intuitive multi-stage controller allows the individual baker to customize his program to achieve the final baked result he and his customers desire. Available in a range of standard sizes as well as custom built options, Pani Clima has a solution to fit within the available space in your bakery.





PK1-68, PM1-68 PK2-68W, PK3-68W, PK4-68WS

Retarder Prover - Roll in

| Model | Dimensions (mm) | | | Door Configuration |
|----------|--------------------|-------|--------|---------------------------------------------------------|
| | Width | Depth | Height | Door Conniguration |
| PK1-68 | 950 | 905 | 2585 | - |
| PM1-68 | 890 | 905 | 2585 | - |
| PK2-68W | 1550 | 1150 | 2780 | One swing door on left hand side |
| PK3-68W | 2350 | 1150 | 2780 | 2 single doors in "U" shape configuration |
| PK4-68WS | 1750 | 1950 | 2780 | 2 Swing doors, racks positioned 2 in front, 2 behind |

Electrical Requirements


220-240V, 1P+N+E, 50Hz

Additional Information

Minimum ceiling height: 2900mm

PM1-68 to be attached to existing PK1-68 external wall

PK2-68W, PK3-68W, PK4-68WS are combinations of both refrigeration & humidity systems RO System required

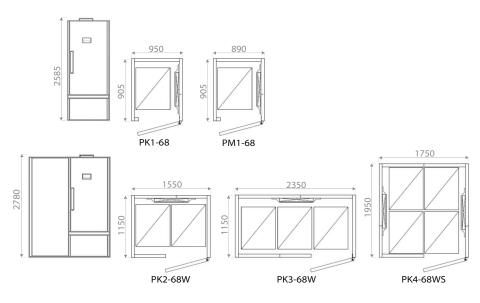

moffat.com.au moffat.co.nz

Australia

moffat.com.au

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

New South Wales

Telephone +612-8833 4111 nswsales@moffat.com.au

South Australia

Telephone +613-9518 3888 vsales@moffat.com.au

Queensland

Telephone +617-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone +618-9413 2400 wasales@moffat.com.au

New Zealand moffat.co.nz

Moffat Limited

Rolleston

45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150 sales@moffat.co.nz



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice. This specification sheet is meant for commercial purpose only.

an Ali Group Company

