

PW1x

FRONT LOADING WAREWASHER


WASHTECH®



STANDARD FEATURES

- 2, 4 and 6 minute cycles
- Front loading chamber with W720 x D600 x H750 capacity
- 2.0HP wash pump
- Hybrid controls
- Dual chemical pumps
- Assured rinse including booster pump
- Hands-free drainage system with sump and drain pump
- Two-stage stainless steel wash and drain filtration
- Heavy-duty stainless-steel construction and manifold
- Independent stainless-steel wash and rinse arms

- 2x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)
- 1x plumbing connection kit (water and chemical hoses)

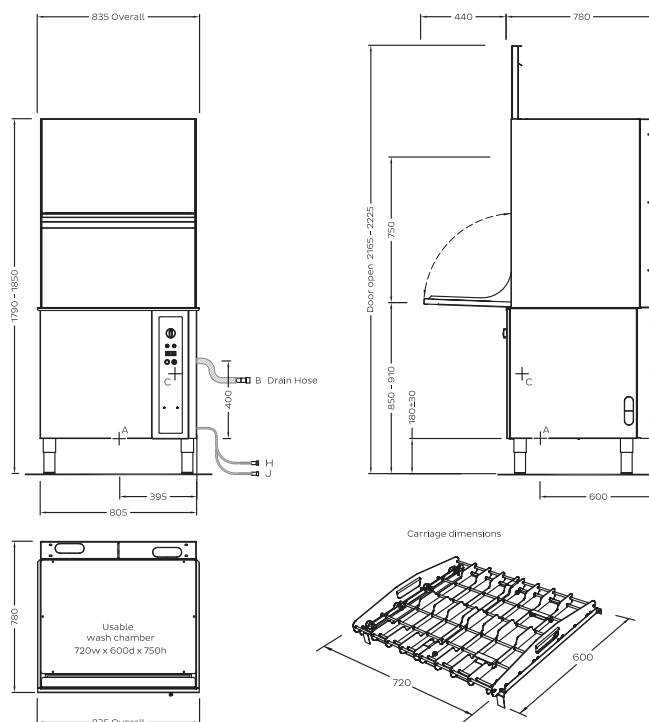

SPECIFICATIONS

A - Hot Water

Temperature	50-65°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle

B - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW
Three phase	400-415	50	15
Three phase	400-415	50	25

Dimensions

	Machine	Packed
Width (mm)	835	1000
Depth (mm)	780	910
Height (mm)	1790	1750
Weight (kg)	164	189
Volume (m3)		1.6

Water Quality

	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.1

Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited

© Copyright Washtech Limited / Washtech PW1 Series-4 / WPW10040 / Aug-25