



Classe 7 USB Tall - RC2G C7EVO BLK IS

RANCILIO CLASSE 7 USB TALL 2 GROUP ISTEAM



STANDARD FEATURES

- Factory fitted automated steam wand for one touch milk steaming operation
- Independently programmable buttons can be set for both milk temperature and emulsion
- Tall deck accommodates tall cups up to 145mm in height includes retractable tray for espresso cups
- · RGB lights identifying operating status
- · SB Steady Brew patented heat exchanger technology for outstanding temperature control
- T-Switch, 4 positioned temperature extraction setting for each grouphead upon installation
- Single hot water button with start/stop dosing for full control
- ABM advanced boiler management for outstanding steam pressure control and recovery
- · Ergonomic portafilter holder up to 21g capacity, comfortable for allday operation
- C-Lever quarter turn steam tap features two positions: purge (down) or fully open (up)
- · Hydro hub integrated manifold for precise water delivery and distribution
- · Multifunction onboard computer and USB port for simple programming and data transfer
- Independent water pump and steam pressure control gauges keep
- Built-in volumetric rotary vane water pump for simple and safe installation
- Steam boiler pressure control with mechanical pressure stat
- Automated cleaning programme simplifies your daily clean

OVERALL CONSTRUCTION

- · Hand rolled copper steam boiler -11 litre capacity
- Brushed stainless steel front and rear panels
- Anthracite black ABS nylon side panels
- Optional ice white side panels
- Backflow valve on boiler and steam tap
- Adjustable feet with optional extensions

CONTROLS

- Soft-touch keypads with 4 programmable drink dosing pre-sets for easy espresso preparation
- White LED backlights easy to read keypad buttons
- Two manual steam wands for frothing and steaming milk

CLEANING AND MAINTENANCE

- · Stainless steel drip tray dishwasher safe
- Easy Clean manages the cleaning process of group heads to perform automatically
- · Genuine cleaning products sold separately

INCLUDES

- · iSteam retrofit kit factory fitted
- 1x Single group handle
- 1 x Single filter basket 16g
- 2 x Double group handle
- 2 x Double filter basket 21g
- 1 x Rubber blind filter disc
- 1x Group head cleaning brush
- User manual / Warranty card

MATCHING PRODUCTS















CLASSE 5 USB TALL 2 GROUP COMPACT

CLASSE 5 USB TALL 2 GROUP

CLASSE 7 USB TALL 2 GROUP

CLASSE 7 USB TALL 3 GROUP



Classe 7 USB Tall - RC2G C7EVO BLK IS

RANCILIO CLASSE 7 USB TALL 2 GROUP ISTEAM

TECHNICAL INFORMATION

Dimensions

 Width:
 771mm

 Depth:
 539mm

 Height:
 520mm

 Nett weight:
 57kg

 Boiler Capacity:
 11 litres

ELECTRICAL

Power requirements: 240V, 1P+N+E, 50/60Hz, 4.3kW, 20A cordset fitted Boiler Power: 3.75kW

RANCILIO WATER SPECIFICATION



Optimum Parameter	Measurement Range
TDS <135	Never more than 50 PPM more than to Total Hardness
Carbonate Hardness 50 ppm	40-90 ppm
Total Hardness 85 ppm	50-100 ppm
pH (ideal) 7	6.5 – 8.5
Chlorides CI -	< 30 ppm

WATER CONNECTIONS AND DRAINS

- 40mm PVC drain and waste trap 300mm upstand
- · Fixed water supply connection
- Mains cold water 3/8" BSP male thread connection
- Flow pressure: 200kPa -500kPa, min 4L/min

MOFFAT

Australia www.moffat.com.au New Zealand www.moffat.co.nz

Australia Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone +61 3-9518 3888 Facsimile +61 3-9518 3833 vsales@moffat.com.au

New South Wales

Telephone +61 2-8833 4111 nswsales@moffat.com.au

South Australia

Telephone +61 3-9518 3888 vsales@moffat.com.au

Queensland

Telephone +617-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone +61 8-9413 2400 wasales@moffat.com.au

New Zealand Moffat Limited

Christchurch

45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150 sales@moffat.co.nz










In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice

© Copyright Moffat Ltd AN.RAN.2301

INSTALLATION CLEARANCE

- Allow 152.4mm / 6" clearance on all sides of the machine.
- Allow 609mm x 127mm / 24" x 5" for in-line filter. Filter can be mounted behind the machine or under the counter.
- Allow a minimum of 3" (762 mm) clear space under filter to facilitate filter change.
- · All services to be within 1m of machine placement
 - Always refer to installation manual

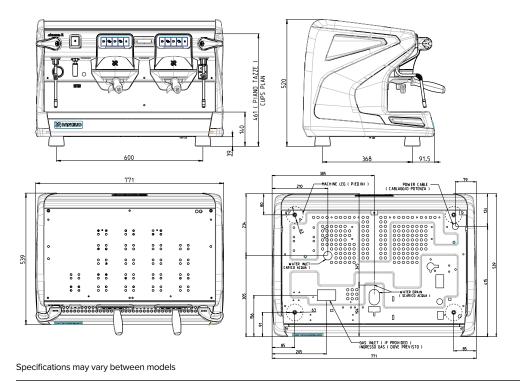

an Ali Group Company

