



TECHNICAL SPECIFICATION SHEET FOR

# Icematic Ice Flaker - Self Contained **SF200C**




- Self-contained undercounter ice flaker with built-in storage bin
- **190kg** daily production rate
- **50kg** storage bin capacity
- **6.5 litre** per hour water consumption
- Vertical freezing cylinder
- Air cooled condensing unit
- R290 propane refrigerant gas
- Electronic control panel with LED showing proper functioning or warning indicators
- Optical ice level control with yellow LED light indicator when full
- Stainless steel external body
- Moffat TA13-NZ filter kit, including head and fittings

Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.



### TECHNICAL SPECIFICATION SHEET FOR

# Icematic Ice Flaker - Self Contained SF200C

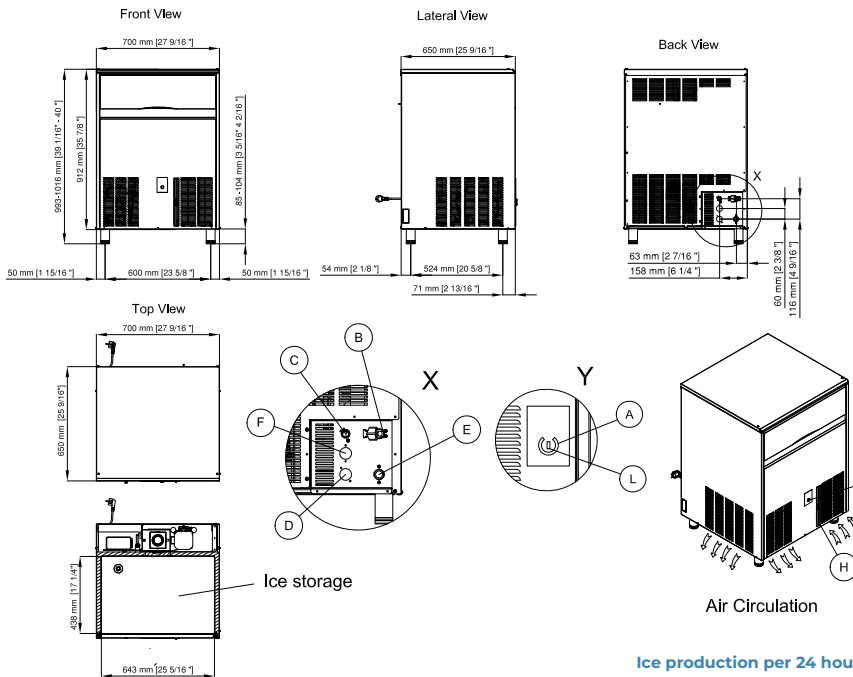

- A** Switch Touch START-STANDBY
- B** Electrical cable supply
- C** Water outlet connection  $\varnothing$  20 mm
- D** Water outlet connection water condensation  $\varnothing$  20 mm
- E** Water inlet connection - 3/4" gas
- F** Water Inlet connection water condensation - 3/4" gas OPTIONAL
- H** Air Filter
- L** Led white-red regulatone humidity ice and set T° storage probe

#### Ice production per 24 hours

		Water temperature				
		32°	21°	15°	10°	
Ambient temperature	10°	180	194	198	210	kg
	21°	160	174	181	190	kg
	32°	140	155	162	169	kg
	38°	133	147	154	160	kg

## SF200C

### Dimensions

Width: 700mm  
 Height: 995mm  
 Depth: 650mm  
 Nett weight: 65kg  
 Packed weight: 72kg

### Water consumption

Air cooled condensing unit: 6.5 litres per hour

### Electrical rating

220-240V, 1P+N+E, 50Hz  
 Compressor power rating 878W  
 Total absorbed power 720W,  
 10A cordset fitted

### Refrigerant type

R290

### Installation distance from wall

- rear 150mm  
 - right 150mm  
 - left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

### Water connection requirements

Inlet connection: R 3/4"  
 Cold water (5-35°C)  
 Pressure (1-5 bar)  
 Water outlet connection:  $\varnothing$  20mm



moffat.co.nz

New Zealand  
 Moffat Limited  
 Christchurch  
 45 Illinois Drive  
 Rolleston  
 Christchurch 7675  
 Telephone 03-983 6600  
 Facsimile 03-983 6660  
 sales@moffat.co.nz  
 Auckland  
 Telephone 09-574 3150  
 sales@moffat.co.nz

Disclaimer:  
 All unit capacities are based on subjective testing. Moffat accepts no liability for production values.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd  
 NZ.ICES.2301

