



# WD-18CW-F1

## SINGLE ROLLER DOOR TROLLEY DISHWASHER FLOOR MOUNTED MODEL

#### STANDARD FEATURES:

- Single roller door trolley washer
- Floor mounted trolley washers including incline ramp roll-in
- 30-40 wash cycles per hour
- 6 litres per cycle cold water consumption
- 200 litre wash tank volume
- 6 levels of wash cycle for varying types of soiled product
- Maximum 250kg load capacity
- 2.2kW wash pump with 12kW booster heater
- Standard trolley size suitable W 1070mm x D 1030mm x H 1850mm
- Suitable for narrow space installation

#### **TECHNICAL INFORMATION:**

Hot water connection: R 3/4"

Cold water temperature: 5-12°C

Cold water connection: R 3/4"

Cold water pressure: 300kPa Flow: 30 litres per minute Water quality (Hardness): 2-7odH

Water

**Dimensions** Waste

2485mm Connection: 50mm dia direct Width:

Depth: 1975mm Electrical

Height: 2638mm 3P+N+E 400-415V 50/60Hz

52.5kW 80A


Hot water temperature: 50-70°C with steam heated option


3P+N+E 400-415V 50/60Hz Hot water pressure: 100-600kPa

4.5kW 20A

Refer operator manual for complete installation instructions



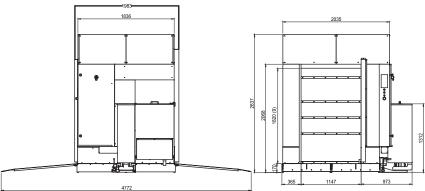



Dimensions 2 pieces 2035x1837x568 2475x1837x2070

### Australia moffat.com.au

Moffat Pty Limited 740 Springvale Road Mulgrave Victoria 3170 Australia Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

#### New Zealand moffat.co.nz

Moffat Limited 45 Illinois Drive Izone Business Hub Rolleston 7675 New Zealand Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN.WDK.SS.1701





