

WD-18CW-F2

DOUBLE ROLLER DOOR TROLLEY DISHWASHER FLOOR MOUNTED MODEL

STANDARD FEATURES:

- Double roller door trolley washer, allows for separation between loading and unloading of trolleys
- Floor mounted trolley washers including incline ramp for roll-in
- 30-40 wash cycles per hour
- 6 litres per cycle cold water consumption
- 200 litre wash tank volume
- 6 levels of wash cycle for varying types of soiled product
- Maximum 250kg load capacity
- 2.2kW wash pump with 12kW booster heater
- Standard trolley size suitable W 1070mm x D 1030mm x H 1850mm
- Suitable for narrow space installation

TECHNICAL INFORMATION:

Dimensions

Width: 2485mm

Depth: 1975mm

Height: 2638mm

Water

Hot water temperature: 50-70°C

Hot water connection: R ¾"

Hot water pressure: 100-600kPa

Cold water temperature: 5-12°C

Cold water connection: R ¾"

Cold water pressure: 300kPa

Flow: 30 litres per minute

Water quality (Hardness): 2-7odH

Waste

Connection: 50mm dia direct

Electrical

3P+N+E 400-415V 50/60Hz


52.5kW 80A

with steam heated option

3P+N+E 400-415V 50/60Hz

4.5kW 20A

Refer operator manual for complete installation instructions

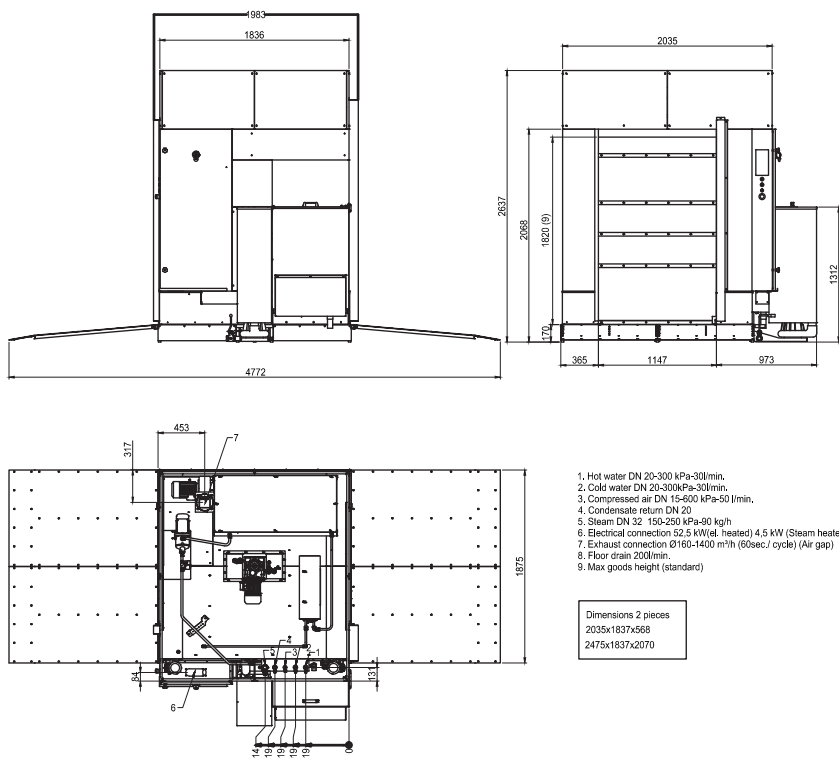

Australia

moffat.com.au

Moffat Pty Limited
740 Springvale Road

Mulgrave

Victoria 3170

Australia

Telephone +613-9518 3888

Facsimile +613-9518 3833

vsales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited
45 Illinois Drive

Izone Business Hub

Rolleston 7675

New Zealand

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.