

# Twin Pan Electric Multi Pan

JUMP 101DL - 158 LITRE



- 2 x 79 litre pan capacity
- 2 x 1/1 GN pan size
- 2 x 30dm<sup>2</sup> cooking surface
- 280mm depth pan
- Multi pan for cooking, frying, braising, grilling, searing, broiling and sous-vide cooking
- Automatic basket lifting
- Automatic water filling system with accuracy of 1 decilitre
- Electromechanical tray tilting at variable speed
- 12" colour touch screen with intuitive controls
- Automatic and manual meal preparation mode with memory for 800 programs with 12 steps
- Multipoint core temperature probe
- Integrated retractable hand shower

## Overall Construction

- Base frame with 3mm 304 grade stainless steel
- Frame cover with 304 grade stainless steel
- Tray with 3mm 316 grade stainless steel
- Special sandwich design pan base
- Stainless steel SUPER BLOCK JPX 17 full area heat distribution system
- Robust double insulated cover with automatic lifting function
- Excessive steam exhaust on cover
- Integrated 230V / 16A socket
- Retractable switchboard panel on right pillar allowing integration of multiple pans in a single block
- Automatic extension of baskets - allows operation with cover closed
- Safety sensor for basket arm detection
- Fault messages shown on display
- Water pressure controller
- HACCP recording
- USB port for data backup

## Controls

- Fast base preheating
- Temperature range from 30°C-250°C
- Accurate sensory measurement of temperature
- Liquid level gauge
- Integrated drainage in the tray bottom with automatic closure
- Preset technological procedures

## Cleaning and Servicing

- Easy clean stainless steel surface
- Easy services access from front and top sides
- Technical and service information on display

# Twin Pan Electric Multi Pan

## JUMP 101DL - 158 LITRE

### Specifications

#### Dimensions

Width 1756mm  
Depth 850mm  
Height 1050mm

#### Capacity

2 x 79 litres

#### Nett weight

395kg

#### Packing data

525kg

Width 1890mm

Depth 970mm

Height 1145mm

#### Electrical rating

415V, 3P+N+E, 50Hz, 50A

Energy consumption: 36.9kW

#### Water connection requirements

Inlet connection: R ¾

Water outlet connection: Ø 50

#### Installation conditions

(for precise installation instructions please refer to our installation manual)



[moffat.com.au](http://moffat.com.au)

[moffat.co.nz](http://moffat.co.nz)

#### Australia

[moffat.com.au](http://moffat.com.au)

#### Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

#### New South Wales

Telephone +612-8833 4111  
[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

#### South Australia

Telephone +613-9518 3888  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

#### Queensland

Telephone +617-3630 8600  
[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

#### Western Australia

Telephone +618-9413 2400  
[wasales@moffat.com.au](mailto:wasales@moffat.com.au)

#### New Zealand


[moffat.co.nz](http://moffat.co.nz)

#### Moffat Limited

Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

#### Auckland

Telephone +64 9-574 3150  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

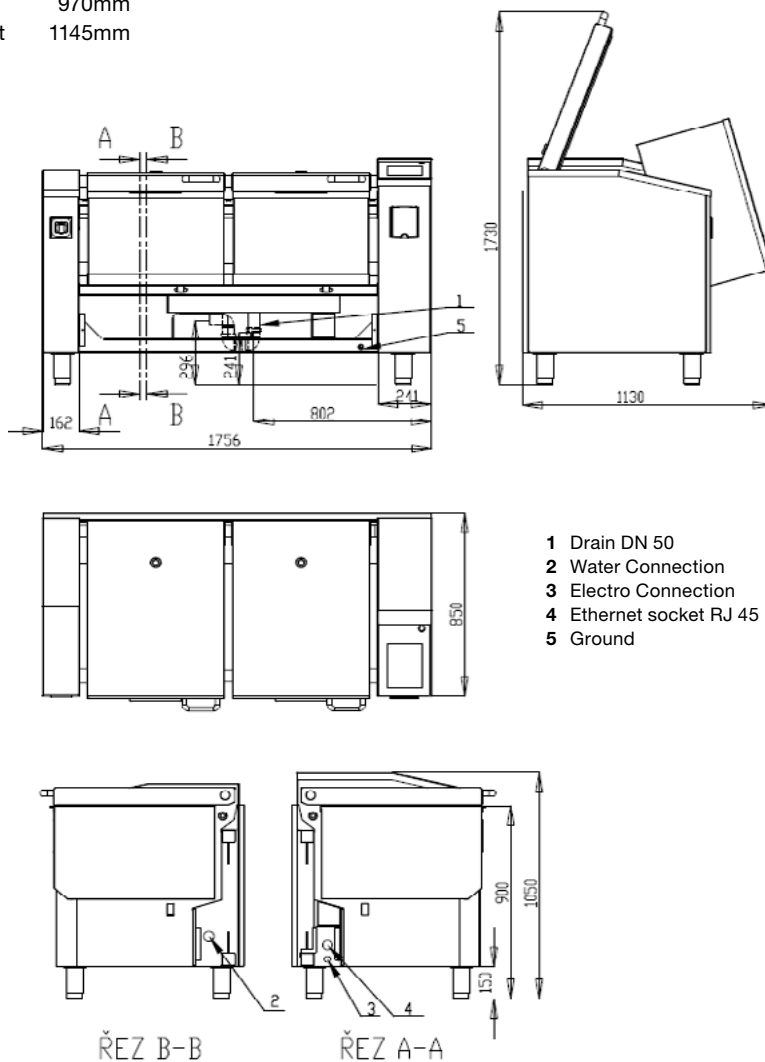

Copyright Moffat Ltd.  
AN.WJ.2023

an Ali Group Company



The Spirit of Excellence