

Single Pan Electric Multi Pan

JUMP 251 - 250 LITRE



- 250 litre single pan capacity
- 4 x 1/1 GN pan size
- 83dm² cooking surface
- 340mm depth pan
- Multi pan for cooking, frying, braising, grilling, searing, broiling and sous-vide cooking
- Automatic basket lifting
- Automatic water filling system with accuracy of 1 decilitre
- Electromechanical tray tilting at variable speed
- 12" colour touch screen with intuitive controls
- Automatic and manual meal preparation mode with memory for 800 programs with 12 steps
- Multipoint core temperature probe
- Integrated retractable hand shower

Overall Construction

- Base frame with 3mm 304 grade stainless steel
- Frame cover with 304 grade stainless steel
- Tray with 3mm 316 grade stainless steel
- Special sandwich design pan base
- Stainless steel SUPER BLOCK JPX 17 full area heat distribution system
- Robust double insulated cover with automatic lifting function
- Excessive steam exhaust on cover
- Integrated 230V / 16A socket
- Retractable switchboard panel on right pillar allowing integration of multiple pans in a single block

Controls

- Fast base preheating
- Temperature range from 30°C-250°C
- Accurate sensory measurement of temperature
- Liquid level gauge
- Integrated drainage in the tray bottom with automatic closure
- Preset technological procedures

- Automatic extension of baskets allows operation with cover closed
- Safety sensor for basket arm detection
- Fault messages shown on display
- Water pressure controller
- HACCP recording

USB port for data backup

Cleaning and Servicing

- Easy clean stainless steel surface
- Easy services access from front and top sidesTechnical and service information on display





Single Pan Electric Multi Pan

JUMP 251 - 250 LITRE

Specifications

Dimensions

Width	2009mm
Depth	850mm
Height	1050mm

Capacity 250 litre

Nett weight

495kg

Packing data


2125mm


530kg Width Depth Height Electrical rating 415V, 3P+N+E, 50Hz, 63A Energy consumption: 50.1kW


Water connection requirements Inlet connection: R 3/4

Water outlet connection: Ø 50 Installation conditions

(for precise installation instructions please refer to our installation manual)

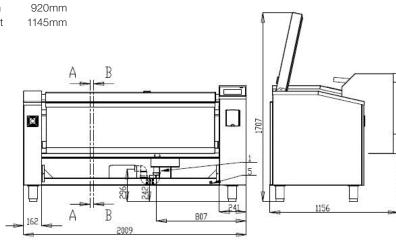

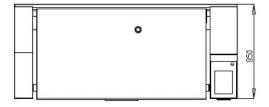

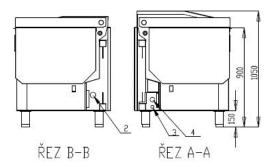

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170

Australia

moffat.com.au

Moffat Pty Limited

Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au New South Wales Telephone +612-8833 4111 nswsales@moffat.com.au

MOFFAT.

moffat.com.au

moffat.co.nz

South Australia Telephone +613-9518 3888 vsales@moffat.com.au

Queensland Telephone +617-3630 8600 qldsales@moffat.com.au

Western Australia Telephone +618-9413 2400 wasales@moffat.com.au

New Zealand moffat.co.nz

Moffat Limited Rolleston

Abilitiois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6660 Facsimile +64 3-983 6660 sales@moffat.co.nz Auckland Telephone +64 9-574 3150 sales@moffat.co.nz

Copyright Moffat Ltd. AN.WJ.2022

an Ali Group Company

1 Drain DN 50

2

4

Water Inlet 3/4"

3 Power Connection

LAN Jack RJ 45

5 Equipotential Bonding

