

CD120

RACK CONVEYOR DISHWASHER


WASHTECH®



STANDARD FEATURES

Capacity of 120 racks / 2,160 plates per hour.
 Water consumption of 240L per hour.
 1200mm single tank wash module with 2.0HP wash pump
 Single stage final rinse.
 Easily maintained electromechanical controls.
 Heavy-duty stainless steel construction and wash system.
 Removable upper and lower heavy-duty stainless steel wash arm cassettes and rinse arms.
 Full width, easily removable stainless steel wash filter trays.
 Powerful drive with safety clutch.
 Auto-start idles dishwasher when no racks are being washed.

2x 500mm dish rack (600 70028)
 2x 500mm cup rack (600 70029)
 2x cutlery container (C660503)
 1x cutlery basket (C660508)

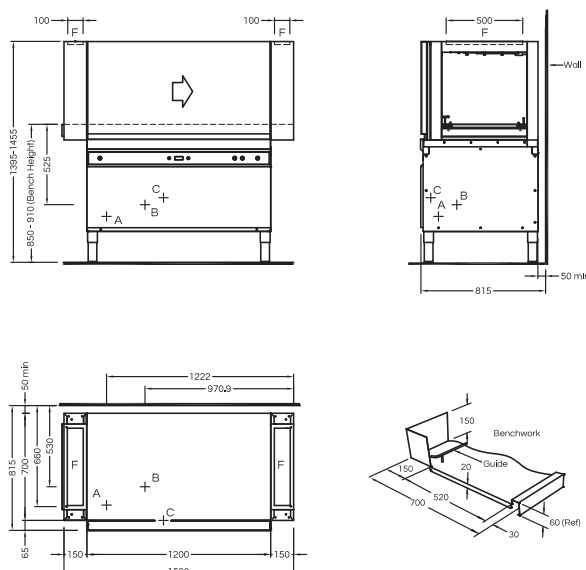

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	250-350kPa
Flow	20L per minute
Backflow prevention	DCV
Consumption	240L per hour*

B - Drainage

Connection	1.5" BSP male
Line	2.0" / 50mm minimum

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400-415	50	25	16.00

F - Extraction

Typical minimum	170L/sec**
-----------------	------------

Dimensions

	Machine	Packed
Width (mm)	1500	1650
Depth (mm)	765	1000
Height (mm)	1455	1500
Weight (kg)	185	265
Volume (m3)		2.48

Water Quality

	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.1

*Water consumption rates may vary based on site conditions.
 **Requirements will vary by site, consult with a ventilation engineer.

Isolating switch must be within 1m of, and not directly behind, the machine.
 Refer to operator manual for installation and operating instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



moftat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
 © Copyright Washtech Limited / Washtech CD120 Series-3 / WCD120xxxx / Sep-25