





STANDARD FEATURES

- 60 second glasswashing cycles
- Compatible with 365mm racks
- Washes up to 540 glasses per hour
- Washtech hybrid controls
- Hot water consumption of 4.5L per cycle
- Selectable end of cycle cold rinse (optional)
- Detergent injector

Includes

- 1x 365mm glassrack
- Quick connection kit (all hoses and 15A plugset)

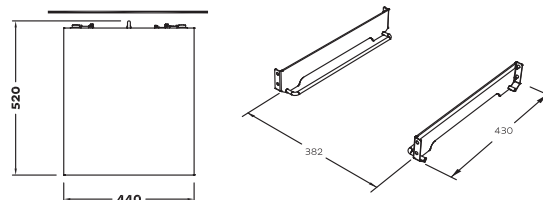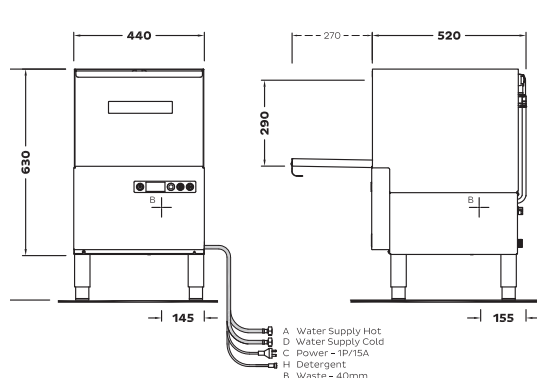

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-500kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	4.5L per cycle*

D - Drainage

Drain connection	1.5" BSP / 40mm
------------------	-----------------

C - Electrical	V	Hz	A/ph	Max kW
Single phase	230-240	50	15	3.15

Dimensions

	Machine	Packed
Width (mm)	440	480
Depth (mm)	520	570
Height (mm)	780**	740
Weight (kg)	33	42
Volume (m3)		0.2

Water Quality

	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.1

*Water consumption rates is based on standard hot water consumption only and will vary based on site conditions and cold rinse usage.
Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

**Suitable for plinth installation with optional feet (min height is 635mm)

an Ali Group Company



the spirit of excellence