

AL8

PASSTHROUGH WAREWASHER


WASHTECH®



STANDARD FEATURES

60, 180 and 300 second cycles
 Washtech Hybrid controls
 Oversized wash chamber W700 x D540 x H650
 2.0HP wash pump
 Dual chemical pumps
 Assured rinse including rinse pump
 Hands-free drainage system with sump and drain pump
 Two-stage stainless steel wash and drain filtration
 Heavy-duty stainless-steel construction and manifold
 Independent stainless-steel wash and rinse arms

1x 600 x 600mm dish rack (600 70042)
 1x 600x 500mm base rack (600 70043)
 1x cutlery container (C660508)
 1x cutlery basket (C660503)
 1x cup cover (K0452)
 1x supplied connection kit (water, drain and chemical hoses) (no lead or plug)

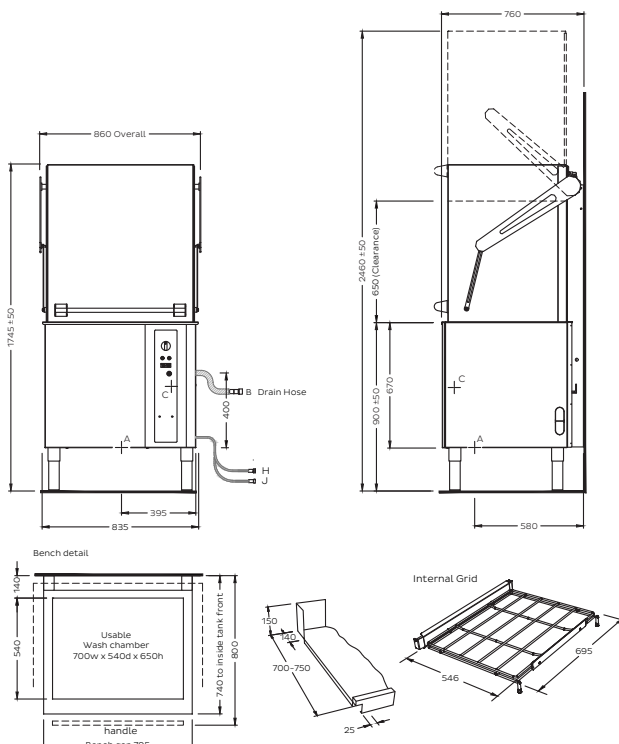

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa*
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.6L per cycle

B - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW
Three phase 400 - 415	50	15	10.50
Three phase 400 - 415	50	25	18.00**

Dimensions

Machine	Packed
Width (mm)	860
Depth (mm)	760
Height (mm)	1745
Weight (kg)	155
Volume (m3)	1.5

Water Quality

Min	Max
pH	7
TDS (ppm)	1
Hardness	100
Cl-	100
SO4	400
Fe	0.1
Cl2	0.1

*Suitable for connection to low flow water supplies.

**Higher power mode removes wash/rinse heating interlock and is recommended for sites with cold water supply.
 Isolating switch must be within 1m of, and not directly behind, the machine
 Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

an Ali Group Company



the spirit of excellence