

# GL

COMPACT UNDERCOUNTER  
POLISH-FREE COMPATIBLE GLASSWASHER

# WASHTECH®



## STANDARD FEATURES

- 1, 2 and 3 minute cycles
- Full insulation and soft close door
- Polish-free glasswashing compatible (add BA14-DW14)
- Capacity of up to 960 glasses per hour
- Tilting rack slide compatible with 365mm to 450mm racks
- Touchscreen controls providing advanced customisation
- 0.3HP soft start wash pump
- Dual chemical pumps
- Assured rinse c/w break tank and booster pump
- Hands-free drainage system with sump and drain pump
- Stainless steel wash and drain filter basket
- Independent stainless steel wash and rinse arms
- Updatable power for rapid rinse recovery (8kW on 3p/15A)
- Heavy-duty stainless steel construction
- Also available in mirror or matte black stainless steel (GL-B)
- 1x 450mm dish rack (600 70081)
- 1x 450mm cup rack (600 70080)
- 1x cutlery container (C660503)
- 1x quick connection kit (all hoses and 1p/15A plugset)

## SPECIFICATIONS

### A - Water<sup>^</sup>

|                     |                            |
|---------------------|----------------------------|
| Temperature         | 20-65°C*                   |
| Connection          | 3/4" male, hose supplied   |
| Pressure            | 100-500kPa                 |
| Flow                | 10L per minute             |
| Backflow prevention | Atmospheric vacuum breaker |
| Consumption         | 2.4L per cycle             |


### D - Drainage

|                       |      |
|-----------------------|------|
| Drain pump flexi-hose | 25mm |
|-----------------------|------|

| C - Electrical | V       | Hz | A/ph | Max kW |
|----------------|---------|----|------|--------|
| Single phase   | 230-240 | 50 | 15   | 3.25   |
| Single phase   | 230-240 | 50 | 25   | 5.25   |
| Three phase    | 400-415 | 50 | 15   | 9.00   |

<sup>^</sup>Upgrade kit available to enable switchable inlet water and on-demand selection of polish-free mode using cold RO water (requires a BA14-DW14), and high capacity mode using a standard hot water feed.

Isolating switch must be within 1m of, and not directly behind, the machine  
Refer to operator manual for installation instructions

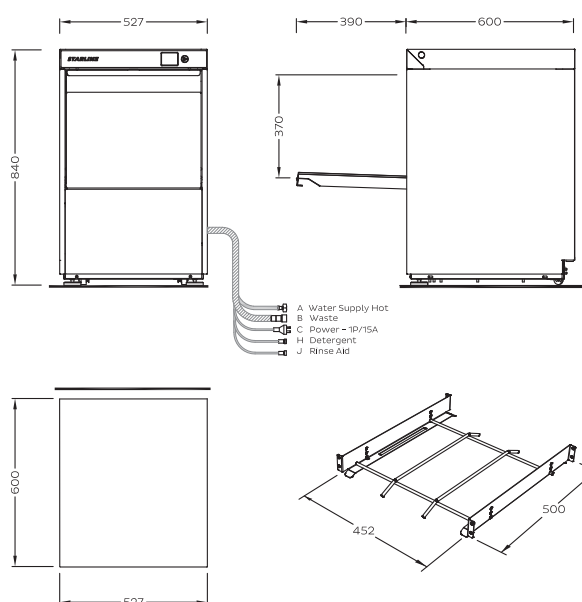

### Dimensions

|             | Machine | Packed |
|-------------|---------|--------|
| Width (mm)  | 527     | 560    |
| Depth (mm)  | 600     | 650    |
| Height (mm) | 840     | 875    |
| Weight (kg) | 68      | 71     |
| Volume (m3) |         | 0.32   |

### Water Quality

|     | Min | Max  |
|-----|-----|------|
| pH  | 7   | 8    |
| TDS | 1   | 135  |
| Cl- |     | 100  |
| SO4 |     | 400  |
| Fe  |     | 0.1  |
| Mn  |     | 0.5  |
| Cu  |     | 0.05 |
| Cl2 |     | 0.1  |

\*Suitable for connection to cold water supply. To minimise recovery time between cycles it is recommended that a 1p/25A or 3/15A power supply is used in conjunction with cold inlet water.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



moffat.com.au | 1300 269 801

Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited

© Copyright Washtech Limited / Washtech GL Series-8 / WGL0040 / Jun-25



an Ali Group Company



the spirit of excellence